

SBU41 series

V1.3

The SBU41 series of AC/DC switching mode power supplies provide 40 Watts of continuous output power. All supplies are UL 94V-1 min compliant. All models meet FCC Part-15 class B and CISPR-22 class B emission limits and are designed to comply with UL/c-UL marking conformity assessment. All units are 100% burned in and tested.

RoHS2
2011/65/EU



40W Open Frame Power Supply for General Purpose

FEATURES:

- * Wide Operating Voltage 90 to 264 VAC, 47 to 63 Hz
- * Internal EMI filter
- * Crowbar Mode Over Voltage Protection
- * Dual and Triple Output
- * Class I system
- * 3 year warranty

APPLICATIONS:

- * Monitor
- * Industrial PC
- * Set-top box
- * AV equipment
- * CCD recorder

GENERAL SPECIFICATION:

- * **Short Circuit Protection:** Auto Recovery
- * **Cooling:** Free Air Convection
- * **Flammability Rating:** UL94V-1
- * **Protection Classes:** Class I
- * **Safety:** UL 60950-1:2nd Edition, IEC 60950-1:2005
(only SBU41-302 is UL/cUL, CB certified)

APPROVALS:



Electrical Characteristics:

Symbol	Characteristic	Condition	Min.	Typ.	Max.	Unit
Vins	Safety Approval Input Voltage Range	Safety Approval & Specification in Label	100		240	VAC
Vin	Input Operate Voltage Range	Detail to see Fig.1	90		264	VAC
Fi	Input Frequency	Sine wave	47		63	Hz
Po	Output Power Range	See Rating Chart			40	W
Iil	Low Line Input Current	Full Load, Vin=100VAC		1.0		A
Iih	High Line Input Current	Full Load, Vin=240VAC		0.41		A
Irl	Low Line Input Inrush Current	Full Load, 25°C, Cool start, Vin=100VAC			30	A
Irh	High Line Input Inrush Current	Full Load, 25°C, Cool start, Vin=240VAC			72	A
Ik	Safety Ground Leakage Current	Vin=240VAC, Fi=60Hz			0.75	mA
η	Efficiency	Full Load, Vin=230VAC, Detail to see Rating Chart	See Rating Chart			
ΔVoi	Line Regulation	Full Load, Vin=100~120VAC	0.5		1	%
ΔVoL	Load Regulation	Vin=230VAC, 10~90% Load Change at Condition	5		10	%
OVP	Over Voltage Protection	Over Voltage Protection	112		132	%
OLP	Over Load Protection	Recovers automatically after fault condition is removed	110		150	%
ttr	Time of Transient Response	Io=Full Load to Half Load, Vin=110VAC			4	ms
thu	Hold-Up Time	Full Load, Vin=100VAC	See Rating Chart			
ts	Start-up time	Full Load, Vin=100~240VAC			2	s
Tc	Temperature Coefficient	Full Load, Vin=100~240VAC			±0.04	%/°C
HV	Dielectric Withstanding Voltage (P-S)	Primary to Secondary			4242	VDC
Vpg	Dielectric Withstanding Voltage (P-G)	Primary to PE			2121	VDC
EMI	EMC Emission	Meet EN55022 (CISPR22)			B	Class

Environmental:

Symbol	Characteristic	Condition	Min.	Typ.	Max.	Unit
To	Operating Temperature	Detail to see Fig.2 (Derate linearly from 100% load at 50°C to 50% load at 70°C)	0		70	°C
Ts	Storage Temperature	10 ~ 95% RH	-40		85	°C
Ho	Operating Humidity	non-condensing	0		95%	RH
Hs	Storage Humidity		0		95%	RH
ESDa	Electro Static Discharge	Air Discharge, IEC61000-4-2			8	kV
ESDc	Electro Static Discharge	Contact Discharge, IEC61000-4-2			4	kV
MTBF	Mean Time Between Failure	Operating Temperature at 25°C, Calculated per MIL-HDBK-217F	100k			h
ELEV	Operating Altitude (Elevation)	All condition			2000	m
VBR	Vibration	10 ~ 500Hz, 10min./1cycle, 60min. each along X, Y, Z axes			5	G
Vsl	Surge Voltage	Line-Neutral			1	kV
Vsg	Surge Voltage	Line-PE & Neutral-PE			2	kV


SBU41 series

V1.3


40W Open Frame Power Supply for General Purpose

SPECIFICATION NOTE :

- Output can provide up to peak load when the power supply starts up. Continuous staying in more than rated load is not allowed.
- At factory, in 60% rated load condition, each output is checked to be within voltage accuracy.
- Line regulation is defined by changing $\pm 10\%$ of input voltage from nominal line at rated load.
- Load regulation is defined by changing $\pm 40\%$ of measured output load from 60% rated load.
- Ripple & noise is measured by using 20MHz bandwidth limited oscilloscope and terminated each output with a 0.47uF capacitor at rated load and nominal line.
- Hold up time is measured from the end of the last charging pulse to the time which the main output drops down to low limit of main output at rated load and nominal line.
- Efficiency is measured at rated load, and nominal line.

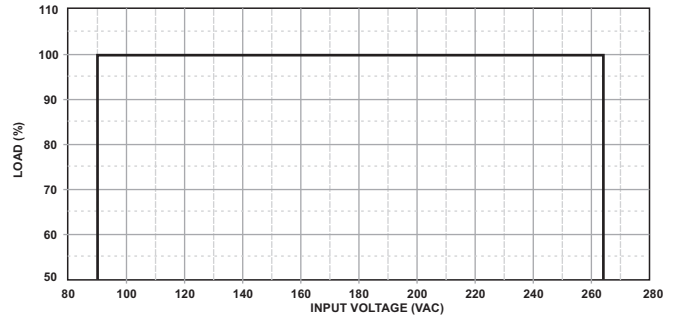


(FIG.1) INPUT VOLTAGE DERATING CURVE

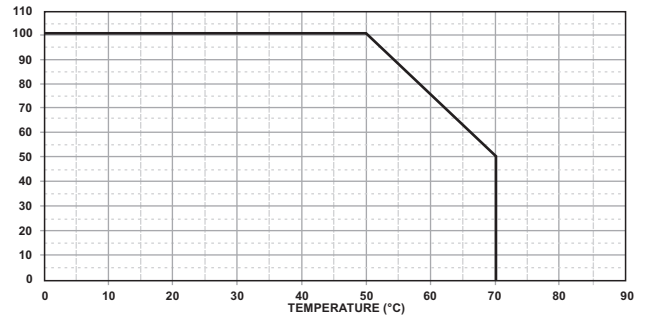

(FIG.2) TEMPERATURE DERATING CURVE

MECHANICAL DIMENSIONS: (UNIT: mm)

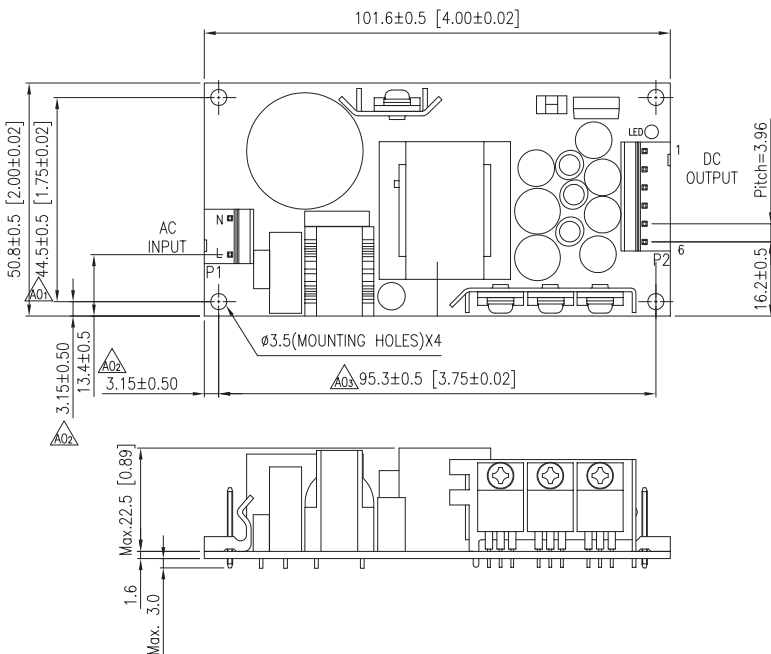

PACKING :

- Dimensions are shown in mm.
- Weight: 145gs approx.
- Input connector mates with Molex housing 09-52-4034 and Molex 2478 series crimp terminal.
- Output connector mates with Molex housing 09-52-4064 and Molex 2478 series crimp terminal.

PIN CHART

MODEL \ PIN	1	2	3	4	5	6
SBU41-2XX	N/C	COM	COM	Vo1	Vo1	Vo2
SBU41-209	Vo3	COM	COM	Vo1	Vo1	N/C
SBU41-210	Vo3	COM	COM	Vo1	Vo1	N/C
SBU41-3XX	Vo3	COM	COM	Vo1	Vo1	Vo2

Note: Vo1:Output#1 Vo2:Output#2 Vo3:Output#3

Rating Chart: (Multi Output)

MODEL NO.	Setting Voltage Range (Factory setting, can't be adjusted)		Output Current (Based on the output volt.)		Maximum Output Power (W)	Ripple & Noise (mVp-p)	Total Regulation (%)	Typ. Efficiency (%)	Typ. No Load Consumption (W)	Hold-Up Time (ms)	Protection Mode
			min	max							
	(VDC)	(A)	(A)								
SBU41-200	Vo1	+3.3	0.5	5.0	40	50	±7	74	3.5	12	Hiccup
	Vo2	+12.0	0.2	2.0		120	±5				
SBU41-201	Vo1	+5.0	0.5	5.0	40	50	±5	74	3.5	12	Hiccup
	Vo2	+12.0	0.2	2.0		120	±5				
SBU41-202	Vo1	+5.0	0.5	5.0	40	50	±5	74	3.5	12	Hiccup
	Vo2	+15.0	0.15	1.5		150	±5				
SBU41-203	Vo1	+5.0	0.5	5.0	40	50	±5	79	3.5	12	Hiccup
	Vo2	+24.0	0.1	1.0		240	±5				
SBU41-209	Vo1	+12.0	0.3	3.0	40	120	±5	80	3.5	12	Hiccup
	Vo3	-12.0	0.1	1.0		120	±10				
SBU41-210	Vo1	+15.0	0.2	2.0	40	150	±5	80	3.5	12	Hiccup
	Vo3	-15.0	0.1	1.0		150	±10				

Note: Vo1:Output#1 Vo2:Output#2 Vo3:Output#3

Rating Chart: (Multi Output)

MODEL NO.	Setting Voltage Range (Factory setting, can't be adjusted)		Output Current (Based on the output volt.)		Maximum Output Power (W)	Ripple & Noise (mVp-p)	Total Regulation (%)	Typ. Efficiency (%)	Typ. No Load Consumption (W)	Hold-Up Time (ms)	Protection Mode
			min	max							
	(VDC)	(A)	(A)								
SBU41-300	Vo1	+3.3	0.5	5.0	40	66	±7	74	3.5	12	Hiccup
	Vo2	+12.0	0.2	2.0		120	±5				
	Vo3	-12.0	0.08	0.8		120	±10				
SBU41-301	Vo1	+5.0	0.35	3.5	40	50	±5	74	3.5	12	Hiccup
	Vo2	+12.0	0.2	2.0		120	±5				
	Vo3	-5.0	0.08	0.8		50	±10				
SBU41-302	Vo1	+5.0	0.35	3.5	40	50	±5	74	3.5	12	Hiccup
	Vo2	+12.0	0.2	2.0		120	±5				
	Vo3	-12.0	0.1	0.6		120	±10				
SBU41-303	Vo1	+5.0	0.35	3.5	40	50	±5	74	3.5	12	Hiccup
	Vo2	+15.0	0.2	2.0		150	±5				
	Vo3	-15.0	0.08	0.8		150	±10				
SBU41-304	Vo1	+5.0	0.35	3.5	40	50	±5	82	3.5	12	Hiccup
	Vo2	+24.0	0.1	1.0		240	±5				
	Vo3	-24.0	0.05	0.5		240	±10				
SBU41-305	Vo1	+5.0	0.35	3.5	40	50	±5	82	3.5	12	Hiccup
	Vo2	+24.0	0.1	1.0		240	±5				
	Vo3	-12.0	0.08	0.8		120	±10				
SBU41-306	Vo1	+3.3	0.5	5.0	40	66	±7	74	3.5	12	Hiccup
	Vo2	+12.0	0.2	2.0		120	±5				
	Vo3	-5.0	0.08	0.8		50	±10				

Note: Vo1:Output#1 Vo2:Output#2 Vo3:Output#3

SBU41-302 is UL/cUL, CE, CB, TUV certificated. If require other model for safety approvals, please contact sales.