

MPU100 series

V1.1

The MPU100 series of AC/DC switching mode power supplies provide 100 Watts of continuous output power. All supplies are UL94V-1 min compliant. All models meet FCC Part-18 class B and CISPR-11 EN55011 class B emission Limits and are designed to comply with UL/c-UL(UL 60601-1:2nd Edition), TUV/T-mark(IEC 60601-1:2nd Edition) and CE marking conformity assessment. All units are 100% burned in and tested.

RoHS2
2011/65/EU



100W External Medical Grade Power Supply

FEATURES:

- * Wide Operating Voltage, 90 to 260 VAC, 47 to 63 Hz
- * IEC-320-C14 Input Inlet
- * Single to Triple Output
- * Over Voltage and Over Load protection
- * ON/OFF SWITCH (Optional)
- * Active Power Factor Correction
- * Class I system
- * 5 year warranty

APPLICATIONS:

- * Medical Equipment
- * Patient Monitor
- * Ultrasound system
- * Blood chemistry analyzer
- * Medical Image

APPROVALS:



GENERAL SPECIFICATION:

- * **Short Circuit Protection:** Auto Recovery
 - * **Cooling:** Free Air Convection
 - * **Flammability Rating:** UL94V-1
 - * **Protection Classes:** Class I
 - * **Safety:** UL/c-UL(UL 60601-1:2nd Edition), TUV/T-mark(IEC 60601-1:2nd Edition)
- The MPU100-105 is available on KC mark (Korea Certification), CCC, BSMI.

Electrical Characteristics:

Symbol	Characteristic	Condition	Min.	Typ.	Max.	Unit
Vins	Safety Approval Input Voltage Range	Safety Approval & Specification in Label	100		240	VAC
Vin	Input Operate Voltage Range	Detail to see Fig.1	90		260	VAC
Fi	Input Frequency	Sine wave	47		63	Hz
PF	Power Factor Correction		0.95		1	
Po	Output Power Range	See Rating Chart			100	W
Iil	Low Line Input Current	Full Load, Vin=100VAC			1.25	A
Iih	High Line Input Current	Full Load, Vin=240VAC			0.50	A
Irl	Low Line Input Inrush Current	Full Load, 25°C, Cool start, Vin=100VAC			50	A
Irh	High Line Input Inrush Current	Full Load, 25°C, Cool start, Vin=240VAC			100	A
Ik	Safety Ground Leakage Current	Vin=264VAC, Fi=63Hz		0.1	0.175	mA
η	Efficiency	Full Load, Vin=230VAC, Detail to see Rating Chart	See Rating Chart			
ΔVoi	Line Regulation	Full Load, Vin=100~120VAC or 200~240VAC	0.5		1	%
OVP	Over Voltage Protection		112		132	%
OLP	Over Load Protection	Recovers automatically after fault condition is removed	110		150	%
ttr	Time of Transient Response	Full Load, Vin=110VAC			4	ms
thu	Hold-Up Time	Full Load, Vin=100VAC	See Rating Chart			
ts	Start-up time	Full Load, Vin=100~240VAC	0.3		2	s
Ris	Insulation Resistance	Primary to Secondary, 500VDC, 25°C/ 70% RH	50			MΩ
Tc	Temperature Coefficient	All Condition			±0.04	%/°C
HV	Dielectric Withstanding Voltage (P-S)	Primary to Secondary, limit current <10mA			4000	VAC
Vpg	Dielectric Withstanding Voltage (P-G)	Primary to PE, limit current <10mA			1500	VAC
EMI	EMC Emission	Compliance to EN55011 (CISPR11), EN60601-1-2	B			Class

Environmental:

Symbol	Characteristic	Condition	Min.	Typ.	Max.	Unit
To	Operating Temperature	Detail to see Fig.2 (Derate linearly from 100% load at 50°C to 50% load at 70°C)	-10		70	°C
Ts	Storage Temperature	10 ~ 95% RH	-40		85	°C
Ho	Operating Humidity	non-condensing	0		95%	RH
Hs	Storage Humidity		0		95%	RH
ESDa	Electro Static Discharge	Air Discharge, IEC61000-4-2			8	kV
ESDc	Electro Static Discharge	Contact Discharge, IEC61000-4-2			6	kV
MTBF	Mean Time Between Failure	Operating Temperature at 25°C, Calculated per MIL-HDBK-217F	100k			h
ELEV	Operating Altitude (Elevation)	All condition			3000	m
VBR	Vibration	10 ~ 500Hz, 10min./1cycle, 60min. each along X, Y, Z axes			5	G
Vsl	Surge Voltage	Line-Neutral			1	kV
Vsg	Surge Voltage	Line-PE & Neutral-PE			2	kV

MPU100 series



V1.1

100W External Medical Grade Power Supply


SPECIFICATION NOTE :

- Output can provide up to peak load when the power supply starts up. Continuous staying in more than rated load is not allowed.
- At factory, in 60% rated load condition, each output is checked to be within voltage accuracy.
- Line regulation is defined by changing $\pm 10\%$ of input voltage from nominal line at rated load.
- Load regulation is defined by changing $\pm 40\%$ of measured output load from 60% rated load.
- Ripple & noise is measured by using 20MHz bandwidth limited oscilloscope and terminated each output with a 0.47uF capacitor at rated load and nominal line.
- Hold up time is measured from the end of the last charging pulse to the time which the main output drops down to low limit of main output at rated load and nominal line.
- Efficiency is measured at rated load, and nominal line.

MECHANICAL DIMENSIONS: (UNIT: mm)

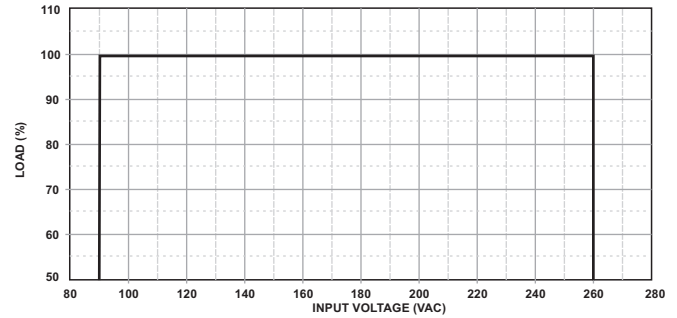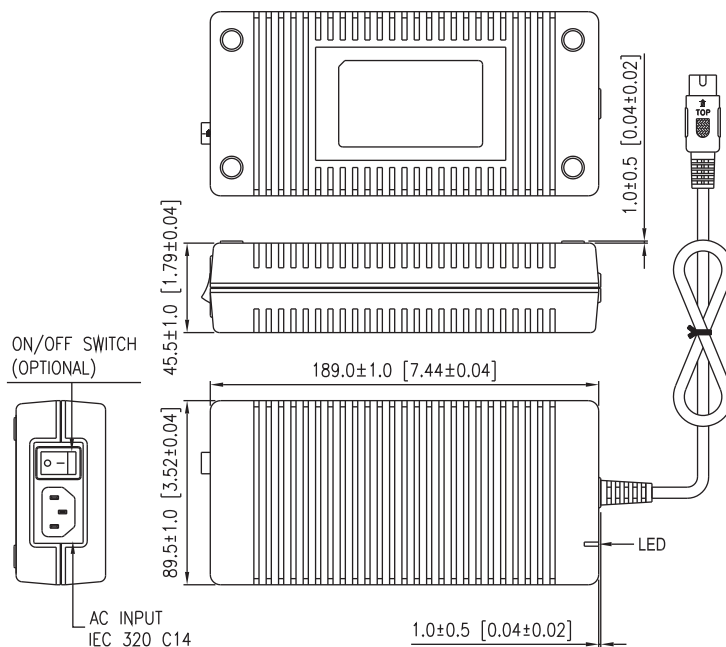

(FIG.1) INPUT VOLTAGE DERATING CURVE

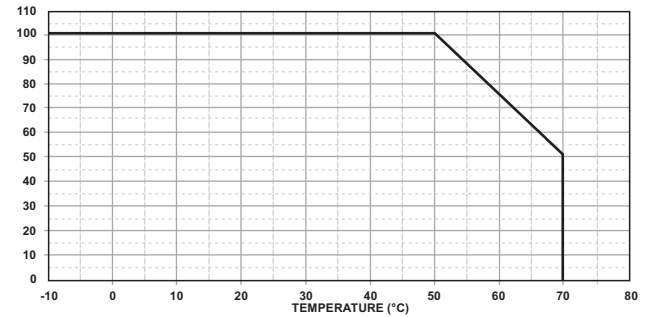

(FIG.2) TEMPERATURE DERATING CURVE

PACKING :

- Net weight: 778~800g approx.
- Optional output connectors available contact sales for details.

Rating Chart: (Single Output)

MODEL NO.	Setting Voltage Range (Factory setting, can't be adjusted)		Output Current (Based on the output volt.)		Maximum Output Power (W)	Ripple & Noise (mVp-p)	Total Regulation (%)	Typ. Efficiency (%)	Typ. No Load Consumption (W)	Hold-Up Time (ms)	Protection Mode
	min	max	min	max							
	(VDC)	(VDC)	(A)	(A)							
MPU100-102	5.0	6.0	11.66	14.00	70	100	±5	81	3	16	Hiccup
MPU100-103	6.0	8.0	10.00	13.33	80	100	±5	82	3	16	Hiccup
MPU100-104	8.0	11.0	8.20	11.25	90	100	±4	83	3	16	Hiccup
MPU100-105	11.0	13.0	7.70	8.33	100	100	±3	83	3	16	Hiccup
MPU100-106	13.0	16.0	6.30	7.70	100	100	±3	84	3	16	Hiccup
MPU100-107	16.0	21.0	4.80	6.30	100	100	±3	84	3	16	Hiccup
MPU100-108	21.0	27.0	3.70	4.80	100	100	±2	84	3	16	Hiccup
MPU100-109	27.0	33.0	3.00	3.70	100	100	±2	84	3	16	Hiccup
MPU100-110	33.0	40.0	2.50	3.00	100	100	±2	84	3	16	Hiccup

Rating Chart: (Multi Output)

MODEL NO.	Setting Voltage Range (Factory setting, can't be adjusted)	Output Current (Based on the output volt.)		Maximum Output Power	Ripple & Noise	Total Regulation	Typ. Efficiency	Typ. No Load Consumption	Hold-Up Time	Protection Mode
		min	max							
	(VDC)	(A)	(A)		(mVp-p)	(%)	(%)	(W)	(ms)	
MPU100-200	+3.3	1.0	10.0	69	100	±7	78.8	3	16	Hiccup
	+12.0	0.3	3.0		100	±5				
MPU100-201	+5.0	1.0	10.0	80	100	±5	78.8	3	16	Hiccup
	+12.0	0.3	3.0		100	±5				
MPU100-202	+5.0	1.0	10.0	80	100	±5	78.8	3	16	Hiccup
	+15.0	0.3	3.0		100	±6				
MPU100-203	+5.0	1.0	10.0	80	100	±5	78.8	3	16	Hiccup
	+24.0	0.2	2.0		100	±7				
MPU100-204	+3.3	1.0	10.0	55	100	±7	78.8	3	16	Hiccup
	+5.0	0.5	5.0		100	±5				
MPU100-209	+12.0	0.7	7.0	80	100	±5	78.8	3	16	Hiccup
	-12.0	0.0	1.0		100	±5				
MPU100-210	+15.0	0.6	6.0	80	100	±5	78.8	3	16	Hiccup
	-15.0	0.0	1.0		100	±5				
MPU100-212	+24.0	0.3	3.0	80	100	±5	78.8	4	16	Hiccup
	-24.0	0.0	1.0		100	±5				
MPU100-215	+5.0	1.0	10.0	74	100	±5	78.8	3	16	Hiccup
	-24.0	0.0	1.0		100	±5				
MPU100-300	+3.3	1.0	10.0	74	100	±7	78.8	3	16	Hiccup
	+12.0	0.3	3.0		100	±5				
	-12.0	0.0	1.0		100	±5				
MPU100-300-1	+3.3	1.0	10.0	74	100	±7	78.8	3	16	Hiccup
	+12.0	0.3	3.0		100	±5				
	+12.0	0.0	1.0		100	±5				
MPU100-301	+5.0	1.0	10.0	80	100	±5	78.8	4	16	Hiccup
	+12.0	0.3	3.0		100	±5				
	-5.0	0.0	1.0		100	±5				
MPU100-301-1	+5.0	1.0	10.0	80	100	±5	78.8	4	16	Hiccup
	+12.0	0.3	3.0		100	±5				
	+5.0	0.0	1.0		100	±5				
MPU100-302	+5.0	1.0	10.0	80	100	±5	78.8	4	16	Hiccup
	+12.0	0.3	3.0		100	±5				
	-12.0	0.0	1.0		100	±5				
MPU100-302-1	+5.0	1.0	10.0	80	100	±5	78.8	4	16	Hiccup
	+12.0	0.3	3.0		100	±5				
	+12.0	0.0	1.0		100	±5				
MPU100-303	+5.0	1.0	10.0	80	100	±5	78.8	4	16	Hiccup
	+15.0	0.3	3.0		100	±6				
	-15.0	0.0	1.0		100	±5				
MPU100-303-1	+5.0	1.0	10.0	80	100	±5	78.8	4	16	Hiccup
	+15.0	0.3	3.0		100	±6				
	+15.0	0.0	1.0		100	±5				

Rating Chart: (Multi Output)

MODEL NO.	Setting Voltage Range (Factory setting, can't be adjusted)	Output Current (Based on the output volt.)		Maximum Output Power	Ripple & Noise	Total Regulation	Typ. Efficiency	Typ. No Load Consumption	Hold-Up Time	Protection Mode
		min	max							
		(A)	(A)							
	(VDC)	(A)	(A)	(W)	(mVp-p)	(%)	(%)	(W)	(ms)	
MPU100-304	+5.0	1.0	10.0	80	100	±5	78.8	3	16	Hiccup
	+24.0	0.3	3.0		100	±5				
	-24.0	0.0	1.0		100	±5				
MPU100-304-1	+5.0	1.0	10.0	80	100	±5	78.8	3	16	Hiccup
	+24.0	0.3	3.0		100	±5				
	+24.0	0.0	1.0		100	±5				
MPU100-305	+5.0	1.0	10.0	80	100	±5	78.8	4	16	Hiccup
	+24.0	0.3	3.0		100	±5				
	-12.0	0.0	1.0		100	±5				
MPU100-305-1	+5.0	1.0	10.0	80	100	±5	78.8	4	16	Hiccup
	+24.0	0.3	3.0		100	±5				
	+12.0	0.0	1.0		100	±5				
MPU100-306	+3.3	1.0	10.0	74	100	±7	78.8	3	16	Hiccup
	+12.0	0.3	3.0		100	±5				
	-5.0	0.0	1.0		100	±5				
MPU100-306-1	+3.3	1.0	10.0	74	100	±7	78.8	3	16	Hiccup
	+12.0	0.3	3.0		100	±5				
	+5.0	0.0	1.0		100	±5				
MPU100-308	+3.3	1.0	10.0	60	100	±7	78.8	3	16	Hiccup
	+5.0	0.3	3.0		100	±5				
	-12.0	0.0	1.0		100	±5				
MPU100-308-1	+3.3	1.0	10.0	60	100	±7	78.8	3	16	Hiccup
	+5.0	0.3	3.0		100	±5				
	+12.0	0.0	1.0		100	±5				