

MPU31 series


v1.7

30W External Medical Grade Power Supply

The MPU31 series of AC/DC switching mode power supplies provide 30 Watts of continuous output power. All models meet FCC Part-18 ,CISPR-11 and EN55011 class B emission Limits , IEC 60601-1-2 and are designed to comply with UL/cUL, TUV T-mark and conformity assessment in CE marking. All units pass burn-in test at full load condition.

FEATURES:

- * Wide Operating Voltage, 80 to 275 VAC, 47 to 63 Hz
- * IEC-320-C14 Input Inlet
- * Single to Triple Output
- * Crowbar Mode Over Voltage Protection
- * Input to Output : 2MOPP
- * High ESD Immunity
- * Suitable Professional Healthcare Facility
- * High Altitude of 5000m
- * Ultra Low Earth Leakage Current < 0.1mA
- * CEC V (MPU31-103~111 only)
- * 5-Year Warranty



APPLICATIONS:

- * Patient Monitor
- * Blood Pressure System
- * Portable Medical Device
- * ECG 、 EEG
- * Medical Tablet

GENERAL SPECIFICATION:

- * **Short Circuit Protection:** Auto Recovery
- * **Cooling:** Free Air Convection
- * **Protection Classes:** Class I
- * **Safety:** IEC 60601-1 Edition 3.1, IEC 60601-1 Edition 3.2, ANSI/AAMI ES60601-1, CSAC22.2 NO.60601-1, EN 60601-1

APPROVALS:



Electrical Characteristics:

Characteristic	Condition	Min.	Typ.	Max.	Unit
Safety Approval Input Voltage Range	Safety Approval & Specification in Label	100		240	VAC
Input Operate Voltage Range	Detail to See Fig.1 (Derate Linearly from 100% Load at 90VAC to 80% Load at 80VAC)	80		275	VAC
Input Frequency	Sine Wave	47		63	Hz
Output Power Range	See Rating Chart			30	W
Low Line Input Current	Full Load, Vin=100VAC		0.90		A
High Line Input Current	Full Load, Vin=240VAC		0.34		A
Low Line Input Inrush Current	Full Load, 25°C, Cool Start, Vin=100VAC			14	A
High Line Input Inrush Current	Full Load, 25°C, Cool Start, Vin=240VAC			33	A
Safety Ground Leakage Current	Vin=240VAC, Fi=60Hz			0.1	mA
Efficiency	Full Load, Vin=230VAC, Detail to See Rating Chart	See Rating Chart			
Line Regulation	Full Load, Vin=100~120VAC or 200~240VAC			1	%
Over Voltage Protection		112		132	%
Over Load Protection	Recovers Automatically After Fault Condition is Removed	110		150	%
Time of Transient Response	Io=Full Load to Half Load, Vin=110VAC			4	ms
Hold-Up Time	Full Load, Vin=110VAC	See Rating Chart			
Start-up time	Full Load, Vin=100~240VAC			2	s
Insulation Resistance		50			MΩ
Temperature Coefficient	All Condition			±0.04	%/°C
Dielectric Withstanding Voltage (P-S)	Primary to Secondary, Limit Current <10mA			4000	VAC
Dielectric Withstanding Voltage (P-G)	Primary to PE, Limit Current <10mA			1500	VAC
EMC Emission	Compliance to EN55011 (CISPR11), EN60601-1-2	B			Class

Environmental:

Characteristic	Condition	Min.	Typ.	Max.	Unit
Operating Temperature	Detail to See Fig.2 (Derate Linearly from 100% Load at 50°C to 50% Load at 70°C)	-10		70	°C
Storage Temperature	10 ~ 95% RH	-40		85	°C
Operating Humidity	Non-Condensing	0		95%	RH
Storage Humidity		0		95%	RH
Electro Static Discharge	Air Discharge, IEC61000-4-2			15	kV
Electro Static Discharge	Contact Discharge, IEC61000-4-2			8	kV
Mean Time Between Failure	Operating Temperature at 25°C, Calculated per MIL-HDBK-217F	200k			h
Operating Altitude (Elevation)	All Condition			5000	m
Vibration	10 ~ 500Hz, 10min./1cycle, 60min. Each Along X, Y, Z Axes			5	G
Surge Voltage	Line-Neutral			1	kV
Surge Voltage	Line-PE & Neutral-PE			2	kV




MPU31 series v1.7

30W External Medical Grade Power Supply

SPECIFICATION NOTE :

1. Output can provide up to peak load when the power supply starts up. Continuous staying in more than rated load is not allowed.
2. At factory, in 60% rated load condition, each output is checked to be within voltage accuracy.
3. Line regulation is defined by changing $\pm 10\%$ of input voltage from nominal line at rated load.
4. Load regulation is defined by changing $\pm 40\%$ of measured output load from 60% rated load.
5. The ripple is measured from peak to peak with a bandwidth-limit of 20MHz (Measured at the output connector with a 0.1uF ceramic capacitor and a 47uF electrolytic capacitor).
6. Hold up time is measured from the end of the last charging pulse to the time which the main output drops down to low limit of main output at rated load and nominal line.
7. Efficiency is measured at rated load, and nominal line.

MECHANICAL DIMENSIONS: (UNIT: mm [inch])

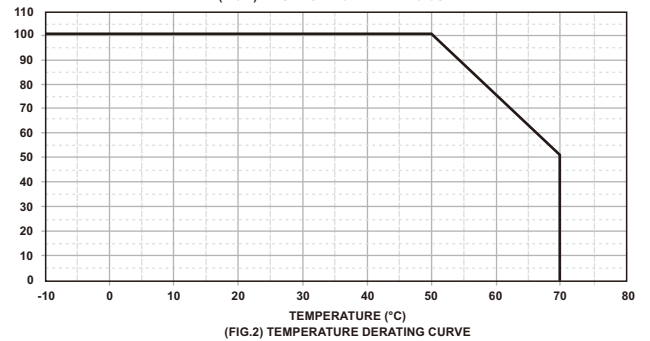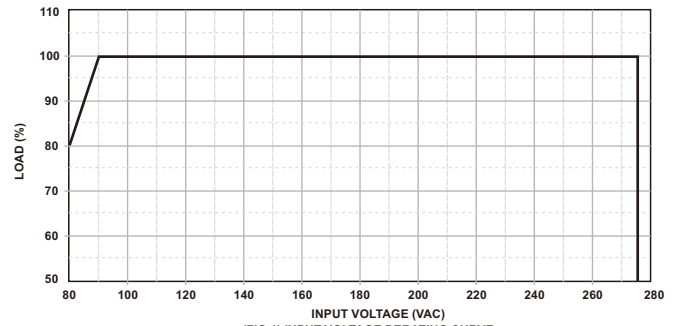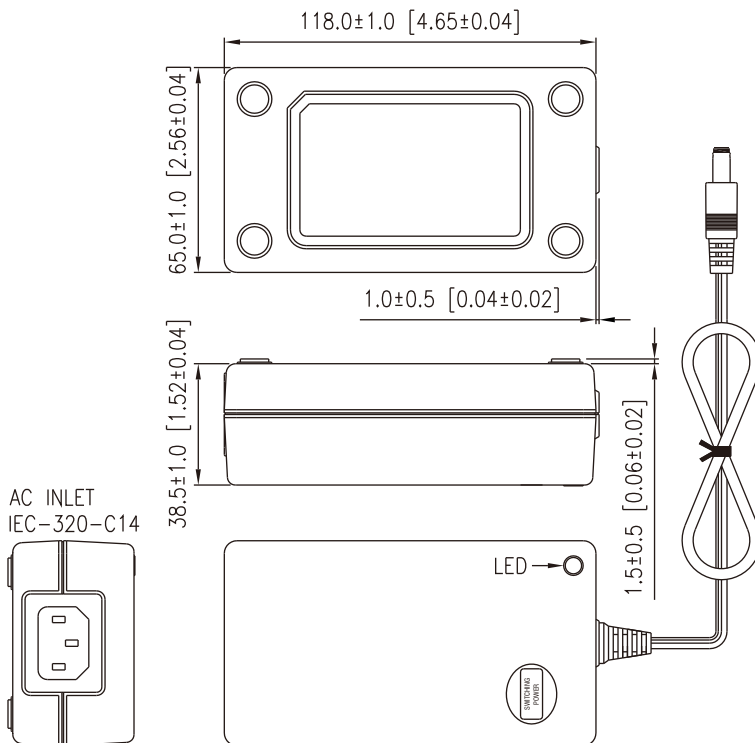

OUTPUT CABLE RECOMMEND :

1. Selected output connectors and wire, please refer to Appendix.
2. MPU31-101~104 are required to use AWG#16/4FT output cable.
3. MPU31-105~108 are required to use AWG#18/6FT output cable.
4. MPU31-109~110 are required to use AWG#20/6FT output cable.
5. The regulation and efficiency will be changed by modified output cable.

PACKING :

1. Net weight: 400~460g approx.
2. Optional output connectors available contact sales for details.

Rating Chart: (Single Output)

MODEL NO.	Setting Voltage Range (Factory setting, can't be adjusted)		Output Current (Based on the output volt.)		Maximum Output Power (W)	Ripple & Noise (mVp-p)	Total Regulation (%)	Typ. Efficiency (%)	Typ. No Load Consumption (W)	Hold-Up Time (ms)	Protection Mode
	min	max	min	max							
	(VDC)	(VDC)	(A)	(A)							
MPU31-101	3.0	5.0	4.00	6.66	20	60	±7	68	0.3	12	Hiccup
MPU31-102	5.0	6.0	4.16	5.00	25	50	±5	77	0.3	12	Hiccup
MPU31-103	6.0	8.0	3.12	4.16	25	60	±5	82.35	0.3	12	Hiccup
MPU31-104	8.0	11.0	2.72	3.75	30	100	±4	83.5	0.3	12	Hiccup
MPU31-105	11.0	13.0	2.30	2.72	30	100	±3	83.5	0.3	12	Hiccup
MPU31-106	13.0	16.0	1.87	2.30	30	100	±3	83.5	0.3	12	Hiccup
MPU31-107	16.0	21.0	1.42	1.87	30	100	±5	83.5	0.3	12	Hiccup
MPU31-108	21.0	27.0	1.11	1.42	30	100	±3	84	0.3	12	Hiccup
MPU31-109	27.0	33.0	0.90	1.11	30	100	±2	86	0.3	12	Hiccup
*MPU31-110	33.0	40.0	0.75	0.90	30	100	±2	86	0.3	12	Hiccup

MPU31-101~102 are not in compliance with CEC V.
 [*]=MOQ is required. Please contact sales.

Rating Chart: (Multi Output)

MODEL NO.	Setting Voltage Range (Factory setting, can't be adjusted)		Output Current (Based on the output volt.)		Maximum Output Power (W)	Ripple & Noise (mVp-p)	Total Regulation (%)	Typ. Efficiency (%)	Typ. No Load Consumption (W)	Hold-Up Time (ms)	Protection Mode
	min	max	min	max							
	(VDC)	(A)	(A)	(A)							
*MPU31-200	+3.3	0.30	3.0		25	66	±7	78	3	12	Hiccup
	+12.0	0.13	1.3			100	±5				
MPU31-201	+5.0	0.30	3.0		30	50	±5	80	3	12	Hiccup
	+12.0	0.13	1.3			100	±5				
*MPU31-202	+5.0	0.30	3.0		30	50	±5	80	3	12	Hiccup
	+15.0	0.10	1.0			100	±5				
MPU31-203	+5.0	0.30	3.0		30	50	±5	81	3	12	Hiccup
	+24.0	0.07	0.7			100	±5				
*MPU31-204	+3.3	0.30	3.0		17.9	66	±7	78	3	12	Hiccup
	+5.0	0.16	1.6			50	±5				
MPU31-209	+12.0	0.20	2.0		30	100	±5	81	3	12	Hiccup
	-12.0	0.05	0.5			100	±10				
MPU31-210	+15.0	0.15	1.5		30	100	±5	83	3	12	Hiccup
	-15.0	0.05	0.5			100	±10				
*MPU31-215	+5.0	0.30	3.0		30	50	±5	83	3	12	Hiccup
	-24.0	0.10	1.0			100	±10				

[*]=MOQ is required. Please contact sales.

Rating Chart: (Multi Output)

MODEL NO.	Setting Voltage Range (Factory setting, can't be adjusted)	Output Current (Based on the output volt.)		Maximum Output Power	Ripple & Noise	Total Regulation	Typ. Efficiency	Typ. No Load Consumption	Hold-Up Time	Protection Mode
		min	max							
		(VDC)	(A)							
*MPU31-301	+5.0	0.25	2.5	25	50	±5	78	3	12	Hiccup
	+12.0	0.11	1.1		100	±5				
	-5.0	0.05	0.5		50	±10				
*MPU31-302	+5.0	0.25	2.5	30	50	±5	80	3	12	Hiccup
	+12.0	0.10	1.0		100	±5				
	-12.0	0.05	0.5		100	±10				
MPU31-303	+5.0	0.25	2.5	30	50	±5	82	3	12	Hiccup
	+15.0	0.10	1.0		100	±5				
	-15.0	0.05	0.5		100	±10				
MPU31-304	+5.0	0.30	3.0	30	50	±5	82	3	12	Hiccup
	+24.0	0.10	1.0		100	±5				
	-24.0	0.05	0.5		100	±10				
*MPU31-305	+5.0	0.30	3.0	30	50	±5	82	3	12	Hiccup
	+24.0	0.10	1.0		100	±5				
	-12.0	0.05	0.5		100	±10				
*MPU31-306	+3.3	0.30	3.0	25	66	±7	78	3	12	Hiccup
	+12.0	0.11	1.1		100	±5				
	-5.0	0.05	0.5		50	±10				

[*]=MOQ is required. Please contact sales.