

DESCRIPTION

The PM60 series of compact, open PCB constructed, AC-DC switching power supplies are capable of delivering 37.5-64 watts of continuous output power at convection cooling. They operate at 90-264 VAC input voltage without the need of voltage selection, and are suited for medical, information technology and industrial applications. Approval to both EN60601-1 and EN60950-1 safety standards improves design-in time and reduces end equipment compliance costs.

FEATURES

- BF Class insulation
- Medical and ITE approvals
- Compact size 2" x 4" x 1.18"
- Single, dual and triple outputs
- Wide-range input 90-264 VAC
- Low earth leakage current
- Level B emissions
- RoHS compliant

INPUT SPECIFICATIONS

Input voltage:	90-264 VAC
Input frequency:	47-63 Hz
Input current:	1.3 A (rms) for 100 VAC 0.7 A (rms) for 240 VAC
Earth leakage current:	150 μ A max. @ 264 VAC, 63 Hz
Touch current:	100 μ A max. @ 264 VAC, 63 Hz


OUTPUT SPECIFICATIONS

Output voltage/current:	See rating chart.
Maximum output power:	See rating chart.
Ripple and noise:	100 mV peak to peak on 3.3 V & 5.0 V models, 1% peak to peak on other models
Overvoltage protection:	Provided on output #1 only; set at 112-132% of its nominal output voltage
Overcurrent protection:	All outputs protected to short circuit conditions
Temperature coefficient:	All outputs $\pm 0.04\%$ / $^{\circ}$ C maximum
Transient response:	Maximum excursion of 4% or better on all models, recovering to 1% of final value within 500 μ s after a 25% step load change

ENVIRONMENTAL SPECIFICATIONS

Operating temperature:	-10 $^{\circ}$ C to +70 $^{\circ}$ C
Storage temperature:	-40 $^{\circ}$ C to +85 $^{\circ}$ C
Relative humidity:	5% to 95% non-condensing
Derating:	Derate from 100% at +50 $^{\circ}$ C linearly to 50% at +70 $^{\circ}$ C

PM60 SERIES



CE
RoHS

SAFETY STANDARD APPROVALS



UL ES 60601-1, CSA C22.2 No. 60601-1
File No. E178020



TÜV EN 60601-1



UL 60950-1, CSA C22.2 No. 60950-1
(except PM60-31-3A by UL)



TÜV EN 60950-1

GENERAL SPECIFICATIONS

Switching frequency:	62 K ± 5 KHz
Efficiency:	80-88% typical except PM60-31-3A and PM60-31-5 A at 75% typical
Hold-up time:	12 ms minimum at 110 VAC
Line regulation:	$\pm 0.5\%$ maximum at full load
Inrush current:	30 A @ 115 VAC, or 60 A @ 230 VAC, at 25 $^{\circ}$ C cold start
Withstand voltage:	4000 VAC from input to output (2 MOPP) 1500 VAC from input to ground (1 MOPP) 1500 VAC from output to ground
MTBF:	400,000 hours at full load at 25 $^{\circ}$ C ambient, calculated per MIL-HDBK-217F
EMC Performance	
EN55011 /EN55022:	Class B conducted, class B radiated
FCC:	Class B conducted, class B radiated
VCCI:	Class B conducted, class B radiated
EN61000-3-2:	Harmonic distortion, class A and D
EN61000-3-3:	Line flicker
EN61000-4-2:	ESD, ± 15 KV air and ± 8 KV contact
EN61000-4-3:	Radiated immunity, 10 V/m
EN61000-4-4:	Fast transient/burst, ± 2 KV
EN61000-4-5:	Surge, ± 1 KV diff., ± 2 KV com
EN61000-4-6:	Conducted immunity, 10 Vrms
EN61000-4-8:	Magnetic field immunity, 30 A/m
EN61000-4-11:	Voltage dip immunity, 30% reduction for 500 ms, 100% reduction for 10 ms


OUTPUT VOLTAGE/CURRENT RATING CHART

Model ⁽¹⁾	Output #1					Output #2				Output #3				Max. Output Power
	V1	Min. Current	Max. Current at convection	Max. Current at 5 CFM ⁽²⁾	ToI.	V2	Min. Current	Max. Current	ToI.	V3	Min. Current	Max. Current	ToI.	
PM60-10A	5 V	0 A	11.0 A	(N/A)	±2%	(N/A)				(N/A)				55 W
PM60-12A	12 V	0 A	5.0 A	(N/A)	±2%	(N/A)				(N/A)				60 W
PM60-13A	15 V	0 A	4.3 A	(N/A)	±2%	(N/A)				(N/A)				64 W
PM60-14A	24 V	0 A	2.7 A	(N/A)	±2%	(N/A)				(N/A)				64 W
PM60-18A	48 V	0 A	1.35 A	(N/A)	±2%	(N/A)				(N/A)				64 W
PM60-23A	+5 V	0.5 A	6.0 A	8 A	±3%	+12 V	0.1 A	3.0 A	±5%	(N/A)				55 W
PM60-25A	+5 V	0.5 A	6.0 A	8 A	±3%	+24 V	0.1 A	1.5 A	±5%	(N/A)				55 W
PM60-31A	+5 V	0.5 A	6.0 A	8 A	±3%	+12 V	0.1 A	3.0 A	±5%	-12 V	0 A	0.5 A	±4%	55 W
PM60-31-3A	+3.3 V	0.8 A	6.0 A	8 A	±3%	+5.2 V	0.1 A	3.0 A	±5%	+12 V	0 A	0.5 A	±4%	37.5 W
PM60-31-5A	+5 V	0.5 A	6.0 A	8 A	±3%	+3.3 V	0 A	1.5 A	±5%	+12 V	0 A	0.5 A	±4%	37.5 W ⁽³⁾
PM60-32A	+5 V	0.5 A	6.0 A	8 A	±3%	+15 V	0.1 A	2.4 A	±5%	-15 V	0 A	0.5 A	±4%	55 W
PM60-39A	+5 V	0.5 A	6.0 A	8 A	±3%	+24 V	0.1 A	1.5 A	±5%	-12 V	0 A	0.5 A	±4%	55 W


- NOTES:
1. Safety approvals are for PCB form only. To order unit with cover fitted, change suffix "A" to "C".
 2. Maximum current of output #1 of multi-output models can be 8 A at 5 CFM forced air provided by user.
 3. It is rated at 37.5 W maximum at convection cooling or 47.5 W maximum at 5 CFM forced air cooling by user.
 4. The output voltages of a multiple output model may go outside of the stated tolerance when an output load current is out of stated limits. All models may be operated at no-load without damage.
 5. Ripple and noise is maximum peak to peak voltage value measured at output within 20 MHz bandwidth, at rated line voltage and output load ranges, and with a 10 µF tantalum capacitor in parallel with a 0.1 µF ceramic capacitor across the output.

MECHANICAL SPECIFICATIONS

OUTPUT POWER DERATING CURVE

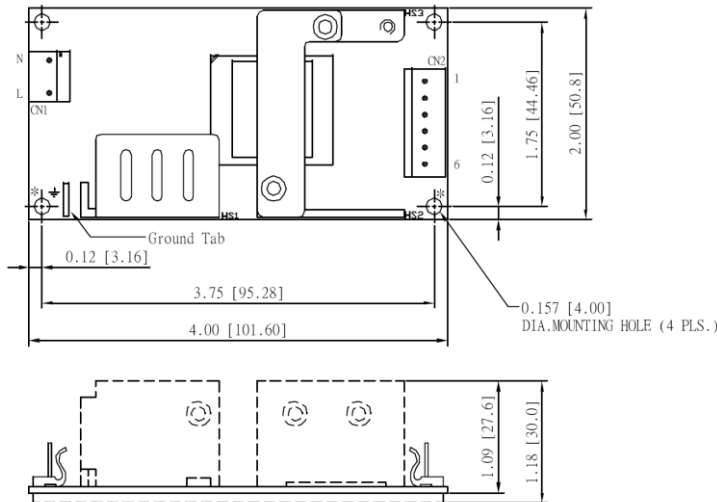

- NOTES:
1. Dimensions shown in inches [mm]
 2. Tolerance 0.02 [0.5] maximum
 3. Connector CN1: Molex header 09-65-2038 or equivalent, mating with Molex housing 09-50-1031 or equivalent.
 4. Connector CN2: Molex header 09-65-2068 or equivalent, mating with Molex housing 09-50-1061 or equivalent.
 5. Ground tab is 0.25 [6.35] x 0.032 [0.8] fast-on connector.
 6. To ensure compliance with level B emissions, connect the two "*" marked mounting holes with metallic standoffs to chassis.
 7. Weight: 205 grams (0.45 lbs.) approx.

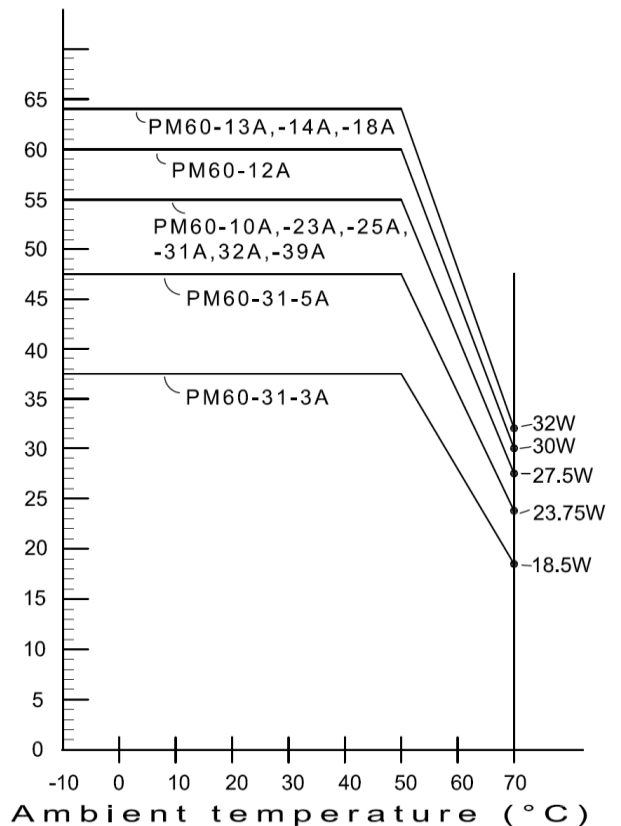

PIN CHART

MODEL	PIN	1	2	3	4	5	6
PM60-10A	PM60-12A	PM60-13A	+V1	+V1	V1 Return	V1 Return	N.C.
PM60-14A	PM60-18A						N.C.
PM60-23A	PM60-25A		V1	V1	Common Return		N.C.
PM60-31A	PM60-32A	PM60-39A	V1	V1	Common Return		V3
PM60-31-3A	PM60-31-5A		V1	V1	Common Return		V3