

**NEW**
**FEATURES**

- ▶ Industrial Standard DIP-8 Package
- ▶ Unregulated Output Voltage
- ▶ I/O Isolation 1500VDC
- ▶ Operating Ambient Temp. Range -40°C to +85°C
- ▶ Short Circuit Protection


**PRODUCT OVERVIEW**

The MINMAX MFSU01 series is a range of isolated 1W DC-DC converter modules in DIP-8. There are 9 models available for 5, 12 or 24VDC input. Advanced circuit topology provides continuous short circuit protection and a high efficiency up to 83% which allows operating ambient temperatures range of -40°C to +85°C without power derating. These converters offer a better solution for all applications where fault condition protection are required.

**Model Selection Guide**

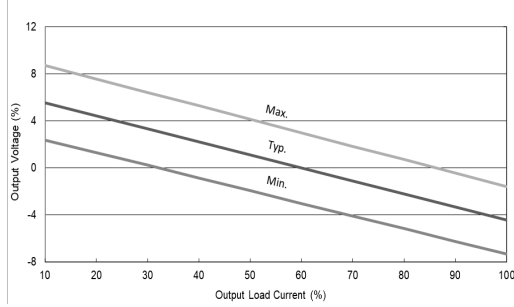
Model Number	Input Voltage (Range)	Output Voltage	Output Current	Input Current		Load Regulation	Max. capacitive Load	Efficiency (typ.)
				Max.	@Max. Load			@Max. Load
	VDC	VDC	mA	mA(typ.)	mA(typ.)	% (max.)	µF	%
MFSU01-05S05	5 (4.5 ~ 5.5)	5	200	250	30	11	220	80
MFSU01-05S12		12	84	246		9		82
MFSU01-05S15		15	67	242		8		83
MFSU01-12S05	12 (10.8 ~ 13.2)	5	200	105	17	8	220	79
MFSU01-12S12		12	84	104		8		81
MFSU01-12S15		15	67	102		8		82
MFSU01-24S05	24 (21.6 ~ 26.4)	5	200	53	10	8	220	78
MFSU01-24S12		12	84	53		8		80
MFSU01-24S15		15	67	52		7		81

**Input Specifications**

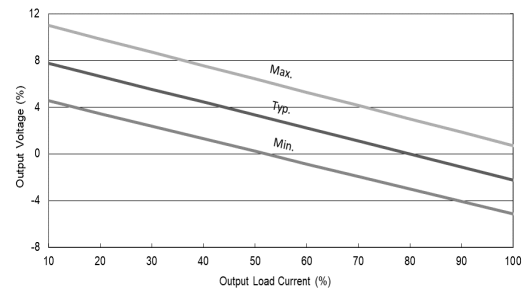
Parameter	Model	Min.	Typ.	Max.	Unit
Input Voltage Range	5V Input Models	4.5	5	5.5	VDC
	12V Input Models	10.8	12	13.2	
	24V Input Models	21.6	24	26.4	
Input Surge Voltage (1 sec. max.)	5V Input Models	-0.7	---	9	VDC
	12V Input Models	-0.7	---	18	
	24V Input Models	-0.7	---	30	
Input Filter	All Models	Internal Capacitor			

**Output Specifications**

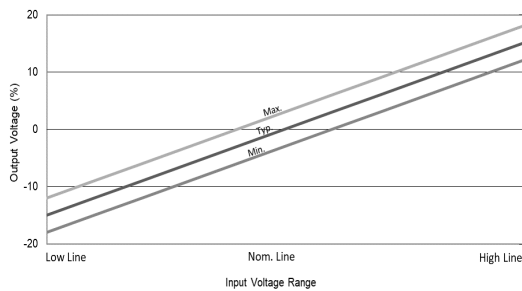
Parameter	Conditions	Min.	Typ.	Max.	Unit
Output Voltage Setting Accuracy		---	---	±3.0	%Vnom.
Line Regulation	For Vin Change of 1%	---	±1.2	±1.5	%
Load Regulation	Io=10% to 100%	See Model Selection Guide			
Ripple & Noise	0-20 MHz Bandwidth	---	---	100	mV <sub>P-P</sub>
Temperature Coefficient		---	±0.01	±0.02	%/°C
Short Circuit Protection	Continuous, Automatic Recovery				

**Output Voltage Tolerance**


Output Voltage VS Output Load Current  
For 5V Output Models



Output Voltage VS Output Load Current  
For 12V & 15V Output Models



Output Voltage VS Input Voltage Range

**General Specifications**

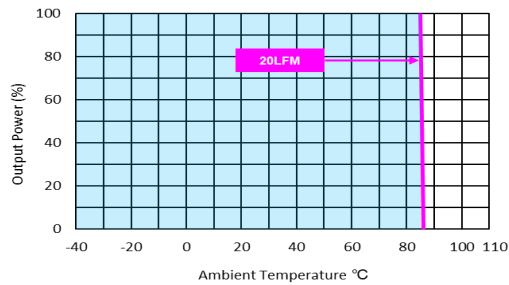
Parameter	Conditions	Min.	Typ.	Max.	Unit
I/O Isolation Voltage	60 Seconds	1500	---	---	VDC
	1 Second	1800	---	---	VDC
I/O Isolation Resistance	500 VDC	1000	---	---	MΩ
I/O Isolation Capacitance	100kHz, 1V	---	20	---	pF
Switching Frequency		50	80	110	kHz
MTBF (calculated)	MIL-HDBK-217F@25°C, Ground Benign	5,067,163	---	---	Hours

**EMC Specifications**

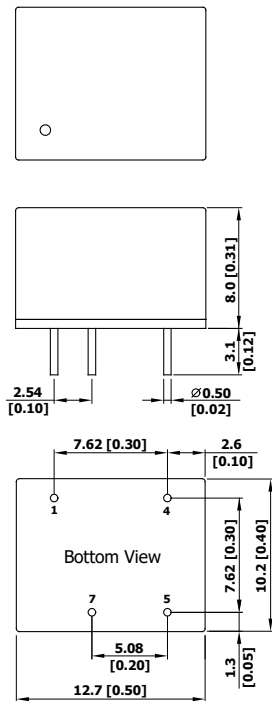
Parameter	Standards & Level			Performance
EMI	Conduction	EN 55032	With external components	Class A <sub>(5)</sub>
	Radiation			
EMS	EN 55024, EN 55035			
	ESD	Direct discharge	Indirect discharge HCP & VCP	
		EN61000-4-2 Air ± 8kV	Contact ± 6kV	
	Radiated immunity	EN 61000-4-3 10V/m		
	Fast transient <sup>(6)</sup>	EN 61000-4-4 ±2kV		
	Surge <sup>(6)</sup>	EN 61000-4-5 ±1kV		
	Conducted immunity	EN 61000-4-6 10Vrms		
PFMF	EN 61000-4-8 30A/m			

**Environmental Specifications**

Parameter	Min.	Max.	Unit
Operating Ambient Temperature Range	-40	+85	°C
Case Temperature	---	+95	°C
Storage Temperature Range	-50	+125	°C
Humidity (non condensing)	---	95	% rel. H
Lead Temperature (1.5mm from case for 10Sec.)	---	260	°C

**Power Derating Curve**

**Notes**

- 1 Specifications typical at Ta=+25°C, resistive load, nominal input voltage and rated output current unless otherwise noted.
- 2 These power converters require a minimum output loading to maintain specified regulation, operation under no-load conditions will not damage these modules; however they may not meet all specifications listed.
- 3 We recommend to protect the converter by a fast blow fuse in the input supply line.
- 4 Other input and output voltage may be available, please contact MINMAX.
- 5 To meet EN55032 Class A an external filter, please contact MINMAX.
- 6 To meet EN61000-4-4 & EN61000-4-5 an external capacitor across the input pins is required, please contact MINMAX.
- 7 Specifications are subject to change without notice.

**Package Specifications**
**Mechanical Dimensions**

**Pin Connections**

Pin	Function
1	-Vin
4	+Vin
5	+Vout
7	-Vout

- ▶ All dimensions in mm (inches)
- ▶ Tolerance: X.X±0.5 (X.XX±0.02)  
X.XX±0.25 (X.XXX±0.01)
- ▶ Pins ±0.05 (±0.002)

**Physical Characteristics**

Case Size	: 12.7x8.0x10.2mm (0.50x0.31x0.40 inches)
Case Material	: Non-Conductive Black Plastic (flammability to UL 94V-0 rated)
Pin Material	: Phosphor Bronze with Tin Plate Over Nickel Subplate
Weight	: 2.1g