

# ODX-3000

## 2400...3000 VA DC/AC INVERTER

### GENERAL FEATURES:

Sine wave output voltage  
 Suitable for motors control  
 Selectable output frequency: 50/60 Hz  
 Adjustable output voltage  
 High input-output isolation 3000 Vrms  
 Remote inhibit  
 Configurable input: Reverse or Mid power  
 Remote control via RS232  
 Alarms by isolated relay contacts  
 Remote off opto-coupled  
 Optional railway version EN50155  
 Fire and smoke: EN45545-2 approved



	24 Vdc 16.8 ... 30 V	36 Vdc 25.2 ... 45 V	48 Vdc 33.6 ... 60 V	72 Vdc 50.4 ... 90 V	110 Vdc 77 ... 138 V
230 Vac	<b>ODX-3000-7413</b> 2400 W	Available under request*	Available under request*	Available under request*	<b>ODX-3000-7417</b> 3000 W
400 Vac	<b>ODX-3000-7403</b> 2400 W	<b>ODX-3000-7404*</b> 3000 W	<b>ODX-3000-7405</b> 3000 W	<b>ODX-3000-7406</b> 3000 W	<b>ODX-3000-7407</b> 3000 W

\*References subject to special MOQs and lead times

**INPUT**

Input voltage range	-30, +25 % Vin nom
Maximum input ripple	5% Vin nom (Vrms, 100 Hz)

**OUTPUT**

Nominal output voltage (Von)	See table
Output voltage range	50 ... 230 Vac (models of 230 Vac output) via RS232 50 ... 400 Vac (models of 400 Vac output) via RS232
Output frequency	50 / 60 Hz via DIP-switch, 5...75 Hz via RS-232
Load regulation	< 4 %
Line regulation	< 2 % Vin -25 % ... +25 % < 10 % Vin -30 % ... +25 % < 20 % Vin -40 % ... +40 % (100ms)
Output waveform distortion THD	< 2 % (average of 16 samples)
Output HF ripple	< 2.5 %

**ENVIRONMENTAL**

	<b>Options B and T</b>	<b>Option L (Note-1)</b>
Storage temperature	-25 ... 80 °C	-40 ... 80 °C
Operating temperature: Full load	-25 ... 55 °C (EN50155 OT1)	-40 ... 55 °C (EN50155 OT2)
Operating temperature: 62.5 % load	-25 ... 70 °C (EN50155 OT3)	-40 ... 70 °C (EN50155 OT4)
Operating temperature: 25 % load	-25 ... 85 °C (EN50155 OT5)	-40 ... 85 °C (EN50155 OT6)
Relative humidity	5 ... 95 %	
Maximum altitude	2000m at full load, 2500m at 95% of load	
Cooling	Controlled internal fan	
Shock and vibration	According to EN61373:2010 + Corr 1:2011 Category 1 class B body mounted	
MTBF (MIL-HDBK-217-E; G <sub>b</sub> , 25 °C)	100.000 h	

**EMC**

Immunity according	EN61000-6-2, EN50121-3-2
Emissions according	EN61000-6-4, EN50121-3-2

**SAFETY**

	<b>Options B and T</b>	<b>Option L</b>
Dielectric strength: Input / Output	3000 Vrms / 50 Hz / 1 min	3000 Vrms / 50 Hz / 1 min
Dielectric strength: Output / PE	1500 Vrms / 50 Hz / 1 min	2500 Vrms / 50 Hz / 1 min
Dielectric strength: Input / PE	1000 Vrms / 50 Hz / 1 min	2500 Vrms / 50 Hz / 1 min
Dielectric strength: Signals (Note-2) / PE, Input	1500 Vrms / 50 Hz / 1 min	1500 Vrms / 50 Hz / 1 min
Dielectric strength: Signals (Note-2) / Output	1500 Vrms / 50 Hz / 1 min	2500 Vrms / 50 Hz / 1 min
Safety according to	EN62368-1	
Fire and smoke according to	EN45545-2 (only for options <b>T</b> and <b>L</b> , railway versions)	

**MECHANICAL**

Weight	< 7150 g
--------	----------

**PROTECTIONS**

Against overloads	Current and I <sup>2</sup> T limited (see overload protection)
Against over-temperature	Shutdown with auto-recovery

**CONTROL**

Output OK LED	Green
Input OK LED	Green
Input alarm	Open when alarm. Maximum rating: 0.16 A at 160 Vdc
Output alarm	Open when alarm. Maximum rating: 0.16 A at 160 Vdc
Remote OFF input	OFF: applying 15...154 Vdc (acc. to EN50155), Impedance >35kΩ
Configurable input (reverse rotation or mid-power)	ON: applying 15...154 Vdc (acc. to EN50155), Impedance >35kΩ

Note-1: Is not recommended to handle connectors below -25°C

Note-2: Signals include RS-232 port, control inputs and alarms outputs




## ORDERING CODES

Model	Input voltage DC [V]	Input voltage range [V]	Output voltage AC [V]	Output current [A]	Active output power [W]	Appar. output power [VA]	Output peak current		Efficien. [%]	No load input current [A]
							5 s (rms) [A]	(Iopk) 10 ms [A]		
<b>ODX-3000-7403</b>	24	16.8 - 30	400	3.46	2400	2400	5.25	11	89	<1.58
<b>ODX-3000-7404*</b>	36	25.2 - 45	400	4.33	3000	3000	6.6	11	90	<1.05
<b>ODX-3000-7405</b>	48	33.6 - 60	400	4.33	3000	3000	6.6	11	91	< 0.79
<b>ODX-3000-7406</b>	72	50.4 - 90	400	4.33	3000	3000	6.6	11	91	< 0.52
<b>ODX-3000-7407</b>	110	77 - 138	400	4.33	3000	3000	6.6	11	92	< 0.34
<b>ODX-3000-7413</b>	24	16.8 - 30	230	6.00	2400	2400	9.0	19	89	<1.58
<b>ODX-3000-7417</b>	110	77 - 138	230	7.55	3000	3000	11.3	19	91	< 0.34

\*References subject to special MOQs and lead times

ODX-3000-74\_ \_ \_

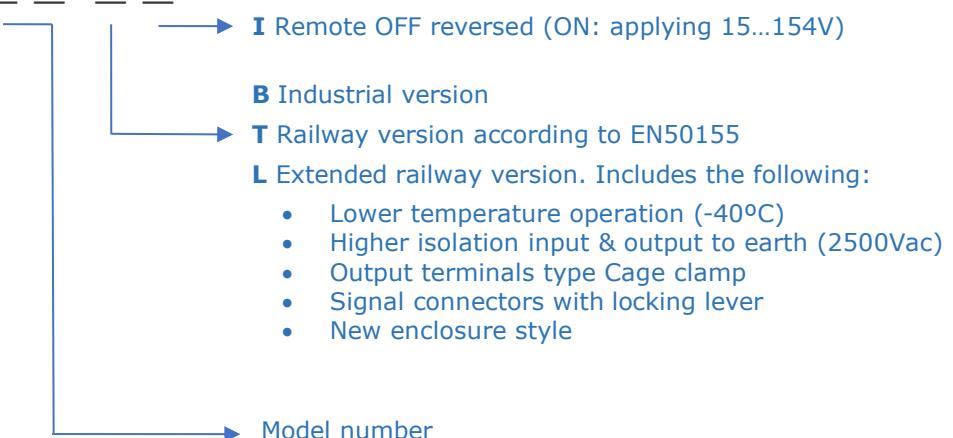

Options B and T




Option L



Accessories must be ordered in a separate order line



## BLOCKS DIAGRAM

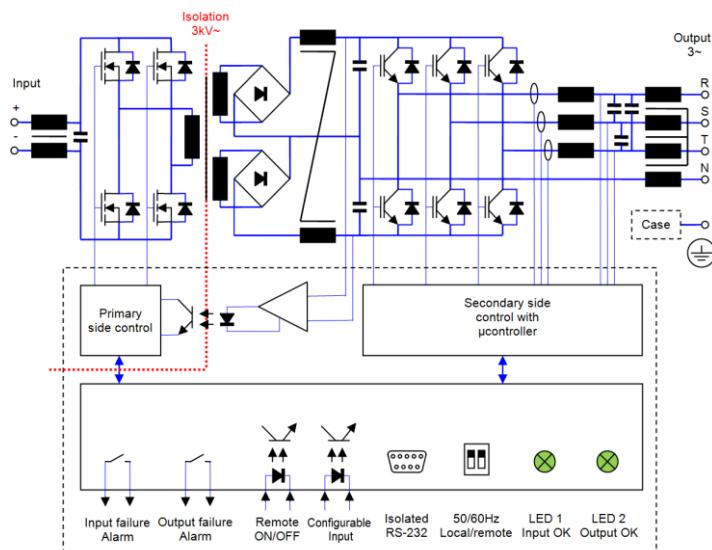

## DESCRIPTION


The ODX-3000 consists of three phase sine-wave DC-AC inverters with galvanic isolation between input and output.

The unit allows:

- Three working modes configurable via switch SW3:

SW3-1	SW3-2	Working mode
OFF (UP)	OFF (UP)	Output frequency: 50Hz or the one programmed by default via RS232, if different from 50Hz. Output enabled by default.
OFF (UP)	ON (DOWN)	Output frequency: 50Hz or the one programmed by default via RS232, if different from 50Hz. Output disabled by default. It is enabled by the PRG3999.9 command (RS232).
ON (DOWN)	OFF/ON (UP/DOWN)	Output frequency: 60Hz.

## CONNECTIONS

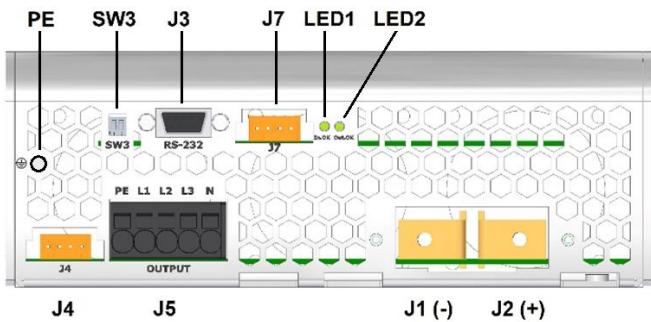

J1	-Vin	Terminals M6 (Rec. torque 6 Nm)
J2	+Vin	Terminals M6 (Rec. torque 6 Nm)
PE	Protective Earth	Stud M5 (Rec. torque 3.8 Nm)
J5 - 1	Protective Earth	Cables 1.5 ... 2.5 mm <sup>2</sup>
J5 - 2	Output R	Cables 0.25 ... 1.5 mm <sup>2</sup>
J5 - 3	Output S	<b>Option B and T</b> Phoenix Contact MC1.5/4-G-3.81 Includes female: MC1.5/4-ST-3.81
J5 - 4	Output T	<b>Option L</b> Wago 734-264 Includes female: 734-204/037-000
J5 - 5	Output Neutral	
J4 - 1	+ Configurable input	
J4 - 2	- Configurable input	
J4 - 3	+ Remote ON/OFF	
J4 - 4	- Remote ON/OFF	
J7 - 1	Output alarm	
J7 - 2	Output alarm	
J7 - 3	Input alarm	
J7 - 4	Input alarm	
J3 - 2	RS-232 Rx	
J3 - 3	RS-232 Tx	
J3 - 5	RS-232 GND	Sub-DB9 female
J3 rest	Not connected	
SW3	Options switch	ON is position down

When SW3-2 is ON (down position), the AC output must be enabled by means of the command PRG3999.9. You will find more information about this and other commands in the table "RS232 communication port" in the section below (see page 6/10).


- Shutdown applying voltage output 15 to 154 V on pins 3 and 4 of J4
- Start-up motors by means of a soft start. In the start-up, the output voltage rises linearly from 0 V to set voltage and the frequency from the initial to the set one. The start-up ramp slope may be changed via RS-232
- Set the rotation speed of a motor according to the appropriate Voltage/Frequency ratio.
- Configurable input (pin 1 and 2 of J4):
  - Reverse mode: Changing the rotation direction for the next start-up of a motor by applying voltage between 15 and 154 V
  - Mid power mode: Changing the output frequency in V/F mode from nominal to a mid-power frequency by applying voltage between 15 and 154 V.
- Monitoring the status of the input and output voltage through the contacts of two separate solid-state relays.
- Set and monitor parameters via RS-232.

The ODX-3000 is equipped with a maximum average power protection as well as maximum output peak current protection. This protects the semiconductors even when an output short-circuit occurs. It also features a disable function for input under-voltage, which allows protecting the batteries from harmful discharges.

## INSTALLATION

- The unit has 4 threaded holes for the fixation on a mounting surface.
- The unit has internal fans. For an appropriate cooling, the air input and output should be free of elements that cause an air flow reduction (minimum recommended distance to other objects 50 mm).
- Make connections as shown in the figure.
- The ground connection can be made through the terminal strip (J5-1) or the ground stud on the front side indistinctly.
- The default output frequency is 50 Hz. For 60 Hz simply actuate the DIP-switch as indicated in the figure.

**For safety reasons, the following requirements must be met:**

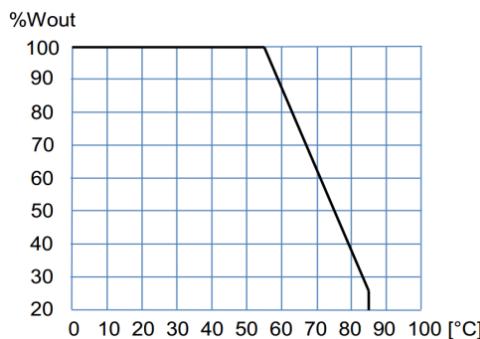**POWER DERATING vs AMBIENT TEMP.**

- Provide the equipment with some kind of protective enclosure that complies with the electrical safety directives in effect within the country where the equipment is installed.
- Include an input fuse with a rating immediately higher than the maximum input current.
- Use cables of adequate cross-section to connect inputs and outputs. The following table lists the maximum currents and the minimum cross-sections for the cables used for each power connection.

	Input 24 V	Input 36 V	Input 48 V	Input 72 V	Input 110 V	Output 230 V	Output 400 V
Maximum current	140 A	130 A	100 A	66 A	44 A	7.55 A	4.4 A
Cable cross-section	50 mm <sup>2</sup>	50 mm <sup>2</sup>	25 mm <sup>2</sup>	16 mm <sup>2</sup>	10 mm <sup>2</sup>	1.5 mm <sup>2</sup>	1.5 mm <sup>2</sup>




## RS232 communication port

It is possible to control and monitor de unit via RS232 by means a terminal emulator like "Tera Term" or "Putty". It is also possible to control and monitor the unit directly using the protocol showed in table:


**Protocol configuration:** ASCII code, 9600 bauds, parity none, 8 bits, 1bit stop

Header	Function	Parameter	Returns	Explanation
L	L	V	PTV####.	Input voltage in Volts
		v	PTv####.	Input voltage ripple in Volts
		U	PTURS=####[13]UST=####[13] UTR=####	Output voltage in Volts RMS ([13] = char 13 of ASCII code)
		I	PTIR=####[13]IS=####[13] IT=####	Output current in Amps RMS ([13] = char 13 of ASCII code)
		T	PTT####.	Internal temperature in K
		F	PTF####.	Nominal output frequency in Hz
		f	PTf####.	Actual output frequency in Hz
		u	PTu####.	Actual output voltage set-point in V
		S	PTS####.	Inverter state <b>999.9</b> → Enabled <b>000.0</b> → Disabled <b>222.2</b> → Blocked by overload <b>111.1</b> → Blocked by overload or short-circuit
		M	PTM####.	Model number
		R	PTR####.	Firmware version
		Other	PTE	Command not supported
		1 ####.	OK / ERR	Set the low input voltage timed shutdown in V
		2 ####.	OK / ERR	Set the minimum alarm input voltage in V
P R G	G	3 ####.	OK / ERR	Change the status bit (after start-up enabled with SW3 =LOCAL and disabled with SW3 =REMOTE) <b>999.9</b> → Inverter enabled <b>000.0</b> → Inverter disabled
		4 ####.	OK / ERR	Set the output voltage in Vrms (Vo). (output must be stopped) 050.0 ≤ ####. ≤ 232.0 (models of 230V output) 050.0 ≤ ####. ≤ 405.0 (models of 400V output)
		5 ####.	OK / ERR	Set the maximum output current in Arms 20% I <sub>nom</sub> ≤ ####. ≤ 100% I <sub>nom</sub>
		6 ####.	OK / ERR	Set the nominal output frequency in Hz (Fo) (output must be stopped) 005.0 ≤ ####. ≤ 075.0
		7 ####.	OK / ERR	Set the alarm maximum output current in Arms 0 < ####. ≤ 100% I <sub>max_warning</sub>
		8 ####.	OK / ERR	<b>111.1</b> → Reset the inverter
		L ####.	OK / ERR	Set the minimum input starting voltage in Volts
		O ####.	OK / ERR	Set the initial frequency in the start-up (Fi) 005.0 ≤ ####. ≤ 075.0
		P ####.	OK / ERR	Set the ramp-up in increment of "N" cycles per Hz in mode V/F, frequency changes or start-up (Note-1) 001.0 ≤ ####. ≤ 100.0
		Q ####.	OK / ERR	Set the ramp-down in decrement of "N" cycles per Hz in mode V/F(Note-1) 002.0 ≤ ####. ≤ 100.0
		Y ####.	OK / ERR	* Change the working mode of the input J4-1,J4-2 <b>111.1</b> → Input as reverse phase control (default) <b>222.2</b> → Input as mid-power control
		X ####.	OK / ERR	* Set the mid-power frequency for V/F mode by the use of input J4-1,J4-2 005.0 ≤ ####. ≤ 75.0
		1 ####.	OK / ERR	Set a new output frequency in Hz (output must be run and not stored in memory) 005.0 ≤ ####. ≤ 075.0
		2 ####.	OK / ERR	Set a new output voltage in Volts (output must be run and not stored in memory) 050.0 ≤ ####. ≤ 232.0 (models of 230V output) 050.0 ≤ ####. ≤ 405.0 (models of 400V output)
		3 ####.	OK / ERR	Set a new output frequency in Hz in mode V/F (output must be run and not stored in memory) 005.0 ≤ ####. ≤ 075.0
		4 ####.	OK / ERR	Changes the output phase order (output must be run and not stored in memory) <b>111.1</b> → Phase RST (direct phase) <b>222.2</b> → Phase SRT (reverse phase)

\* Parameters are only useful from version 6.0 of firmware

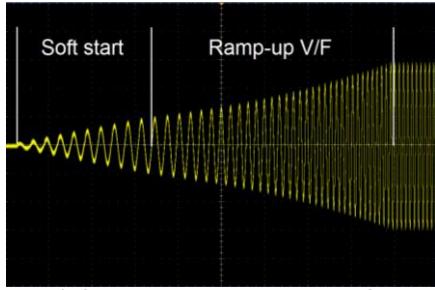**Note 1:**


Example for N=1: start-up time =  $N \times 1.7$  s for changes from 16 Hz to 50 Hz

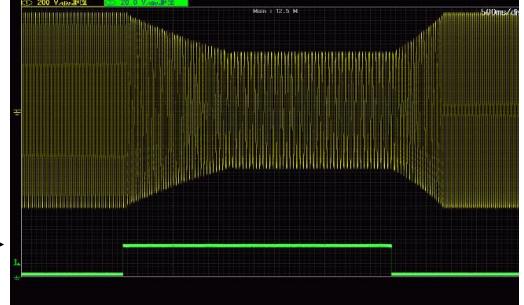**Mode V/F curve**
**Note 2 :**


Example for change from 50Hz / 400 V to 30 Hz and 240 V with ramp-down of 2 cycles / Hz and ramp-up de 1 Cycle/Hz.  
Yellow: output voltage and Green: Mid-Power input signal

## WORKING PARAMETERS


	7403...7417					
Thermal protection	7403 7413	7404	7405	7406	7407 7417	
Internal warning temperature(output alarm)		82				°C
Internal shutdown temperature		98				°C
Internal restart temperature		87				°C
Internal temperature of fan start-up		45				°C
Input voltage parameters	7403 7413	7404	7405	7406	7407 7417	
High input voltage shutdown instantaneous	33.6	50.4	67.2	100.8	154.0	Vdc
High input voltage timed shutdown (t) (Input alarm)	31.2	46.8	62.4	93.6	143.0	Vdc
<u>Low start-up input voltage</u>	16.8	25.2	33.6	50.4	77.0	Vdc
<u>Low input voltage timed shutdown (t) (Input alarm)</u>	<16.8	<25.2	<33.6	<50.4	<77.0	Vdc
Low input voltage instantaneous shutdown	<14.4	<21.6	<28.8	<43.2	<66.0	Vdc
Time to shutdown (t)		500				ms
Output voltage parameters	7403...7407		7413...7417			
<u>Output voltage</u>	400		230			Vac
Output under-voltage shutdown		< 85% of setting 1000 ms				
Warning voltage (output alarm)		< 90% of setting 200 ms				
<u>Initial start-up frequency</u>		16				
Soft start duration		10 cycles				
Ramp-up V/F		1 Hz/cycle				
Output current parameters	7403	7404 ... 7407	7413	7414 ... 7417		
<u>Maximum continuous output current</u>	3.46	4.33	6.30	7.55		A
<u>Warning current (output alarm)</u>	3.46	4.33	6.30	7.55		A
Maximum overload $I^2t$		See figure below				
Time between restart attempts		4000				
Number of attempts of consecutive overload		5				
Working failures and reset	7403...7417					
Lock for continuous overload or internal failure		Unlimited time				
Reset time by input disconnection		> 2				
<u>Configurable parameters underlined</u>						

## OVERLOAD PROTECTION

Protection against overloads and short-circuits	By <b>current</b> limiting at $I_{opk}$ By <b><math>I^2t</math></b> . The unit shutdowns when the current-time is over the continuous operation curve	
Overload protection recovery	Every 4 seconds after shutdown, the unit tries to restart up to 5 times. If the overload persists, the unit reminds shutdown until an <b>input reconnection</b> .	



## DIMENSIONS

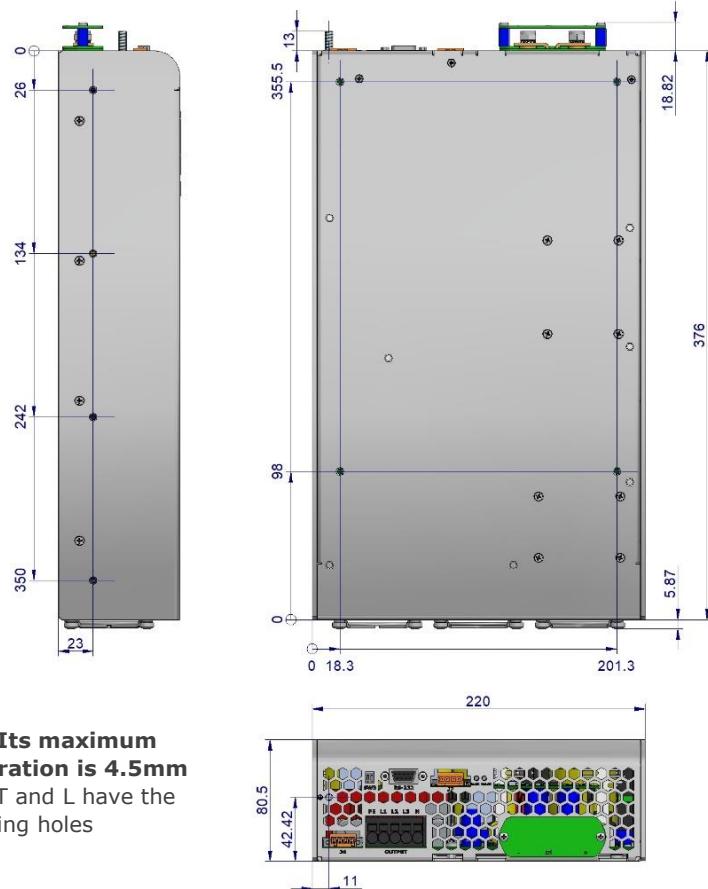


Remarks:

- The fixing holes are M4. **Its maximum allowable depth penetration is 4.5mm**
- Enclosures of models B, T and L have the same dimensions and fixing holes




## ACCESSORIES

Description	Notes	CODE
Mounting brackets kit	Contains two brackets and screws	NP-9282
2U 19" rackmount tray kit	It allows to install one or two ODX-3000	NP-9353

NP-9282

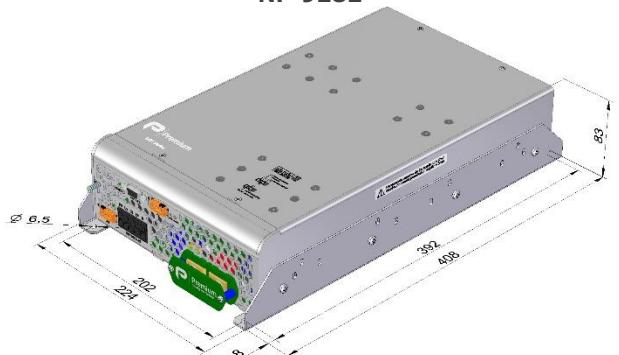

NP-9353

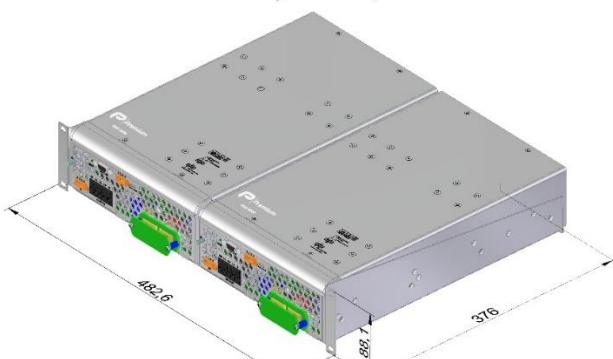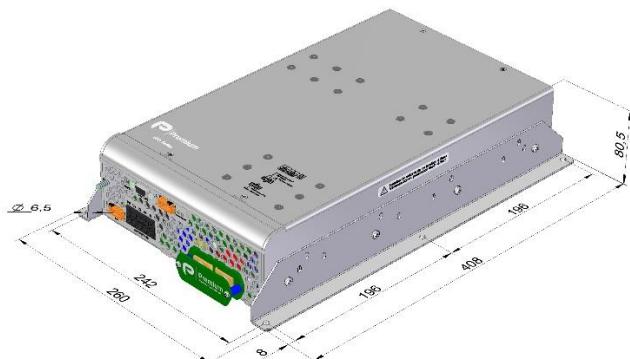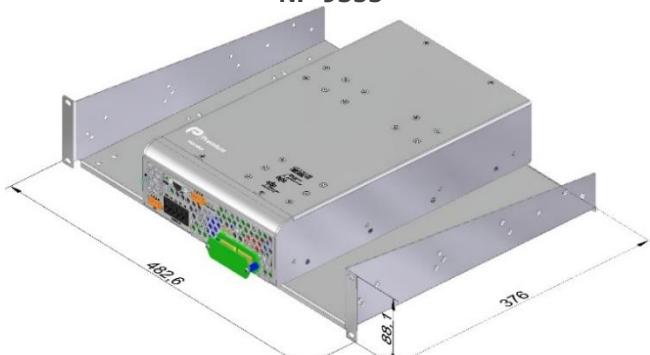



## CE EU DECLARATION OF CONFORMITY

The undersigned, representing the following:

Manufacturer: PREMIUM, S. A.,  
Address: C/ Dolors Aleu 19-21, 08908 L'Hospitalet de Llobregat, SPAIN

herewith declares that the product:

Type: DC/AC converter  
Models: **ODX-3000-7403 ... 7417**

Complies with the essential protection requirements of the following EU directives:

2014/35/EU	Low voltage / The electrical equipment (safety) regulations
2014/30/EU	EMC / Electromagnetic compatibility regulations
2011/65/EU Annex II and its amendment 2015/863/EU	RoHS / Restriction of the use of certain hazardous substances in electrical and electronic equipment

This declaration applies to all specimens manufactured identical to the samples submitted for testing/evaluation.

Assessment of compliance of the product with the requirements relating to aforementioned directives, was performed by Premium S.A. and is based on the following standards:

EN IEC 62368-1:2020	Safety. Audio/video information and communication technology equipment
EN IEC 61000-6-4:2019	Generic emission standard
EN IEC 61000-6-2:2019	Generic immunity standard
EN 50155:2021*	Railway applications. Electronic equipment used on rolling stock material
EN 50121-3-2:2016*	Railway applications. EMC Rolling stock equipment

\* Optional, See annexe

CE marking year: **2013**

### Notes:

For the fulfilment of this declaration the product must be used only for the aim that has been conceived, considering the limitations established in the instructions manual or datasheet.

L'Hospitalet de Llobregat, 24-04-2023

Albert Sole  
Technical Director

**PREMIUM S.A.** is an ISO9001 and ISO14001 certified company by **Bureau Veritas**



## UKCA DECLARATION OF CONFORMITY

The undersigned, representing the following:

Manufacturer: PREMIUM, S. A.,  
Address: C/ Dolors Aleu 19-21, 08908 L'Hospitalet de Llobregat, SPAIN

herewith declares that the product:

Type: DC/AC converter  
Models: **ODX-3000-7403 ... 7417**

Complies with the essential protection requirements of the following regulations:

- |                  |  |
|------------------|--|
| SI 2016 No 1101  | Low voltage / The electrical equipment (safety) regulations  |
| SI 2016 No 1091  | EMC / Electromagnetic compatibility regulations  |
| SI 2012 No. 3032 | RoHS / Restriction of the use of certain hazardous substances in electrical and electronic equipment |

This declaration applies to all specimens manufactured identical to the samples submitted for testing/evaluation.

Assessment of compliance of the product with the requirements relating to aforementioned regulations, was performed by Premium S.A. and is based on the following standards:

- |                       |   |
|-----------------------|---|
| BS EN 62368-1:2020    | Safety. Audio/video, information and communication technology equipment   |
| BS EN 61000-6-4:2019  | Generic emission standard:  |
| BS EN 61000-6-2:2019  | Generic immunity standard   |
| BS EN 50155:2021*     | Railway applications. Electronic equipment used on rolling stock material |
| BS EN 50121-3-2:2016* | Railway applications. EMC Rolling stock equipment                         |

\* Optional, See annexe

UKCA marking year: **2021**

### Notes:

For the fulfilment of this declaration the product must be used only for the aim that has been conceived, considering the limitations established in the instructions manual or datasheet.

L'Hospitalet de Llobregat, 24-04-2023

Albert Sole  
Technical Director

**PREMIUM S.A.** is an ISO9001 and ISO14001 certified company by **Bureau Veritas**



## ANNEXE

Applicable values for the different sections of the norm EN50155: 2017							
4.3.1	Working altitude	Up to 2000m at full load Up to 2500m at 95% of load					
4.3.2	Ambient temperature	For options B and T: Class OT1 (-25 to 55 °C): load < 100 % For options B and T: Class OT3 (-25 to 70 °C): load <62.5 % For options B and T: Class OT5 (-25 to 85 °C): load <25 % For option L: Class OT2 (-40 to 55 °C): load < 100 % For option L: Class OT4 (-40 to 70 °C): load <62.5 % For option L: Class OT6 (-40 to 85 °C): load <25 %					
4.3.3	Switch-on extended operating temp.	ST1					
4.3.4	Rapid temperature variations	H1					
4.3.5	Shocks and vibrations	According EN61373:2010 + Corr 1:2011 Category 1 class B					
4.3.6  EMC Electromagnetic Compatibility  EN50121-3-2:2016		<b>Test</b>	<b>Norm</b>	<b>Port</b>	<b>Frequency</b>		
		Radiated emissions	IEC55016	Case	30 MHz...230 MHz		
					40 dB(µV/m) Qpk at 10 m		
					230 MHz...1 GHz		
					47 dB(µV/m) Qpk at 10 m		
					1...3 GHz		
					Do not apply		
					3...6 GHz		
		Conducted emissions	IEC55016	Input & output	150 kHz...500 kHz		
					99 dB(µV) Qpk		
		<b>Test</b>	<b>Norm</b>	<b>Port</b>	<b>Severity</b>		
		Electrostatic discharge	IEC61000-4-2	Case	±8 kV		
					Air (isolated parts)		
		Radiated high-frequency	IEC61000-4-3	X/Y/Z Axis	±8 kV		
					Contact (conductive parts)		
		Fast transients	IEC61000-4-4		20 V/m		
					0.08...1.0 GHz M. 80% 1 kHz		
					10 V/m		
					1.4...2.1 GHz M. 80% 1 kHz		
		Surge	IEC61000-4-5		5 V/m		
					2.1...2.5 GHz M. 80% 1 kHz		
		Conducted RF	IEC61000-4-6	Input	3 V/m		
					5.1...6 Ghz M. 80% 1 kHz		
		Output			±2 kV		
					Tr/Th: 5/50 ns		
		Signal			±2 kV		
					A		
		PE			±1 kV		
					Tr/Th: 1.2/50 µs		
		Magnetic field	IEC61000-4-8	X/Y/Z Axis	Input L to L		
					±1 kV		
					Input L to PE		
					±2 kV		
4.3.7	Relative humidity	Up to 95%					
5.1.1.2	DC power supply range	From 0.70 to 1.25 Un continuous					
5.1.1.3	Temporary DC power supply fluctuation	From 0.60 to 1.40 Un 0.1 s					
5.1.1.4	Interruptions of voltage supply	From 1.25 to 1.40 Un 1 s without damage					
5.1.1.6	Input ripple factor	Class S1 (without interruptions)					
5.1.3	Supply change-over	10 % peak to peak with a DC Ripple Factor of 5 %					
7.2.7	Input reverse polarity protection	0.6 Un duration 100ms (without interruptions). Performance criterion A					
10.7	Protective coating for PCB assemblies	By external fuse or by using accessory ACI-3000					
13.3	Tests list	1 Visual Inspection 2 Performance test 3 Power supply test 4 Insulation test 5 Low temperature storage test 6 Low temperature start-up test 7 Dry heat test 8 Cyclic damp heat test 9 Salt mist test 10 Enclosure protection test (IP code) 11 EMC test 12 Shocks and vibrations test 13 Equipment stress screening test 14 Rapid Temperature variation test		Routine Routine Routine Routine Type Type Type Type - - Type Type Routine: 24 h at 40 °C and load 100 % -			