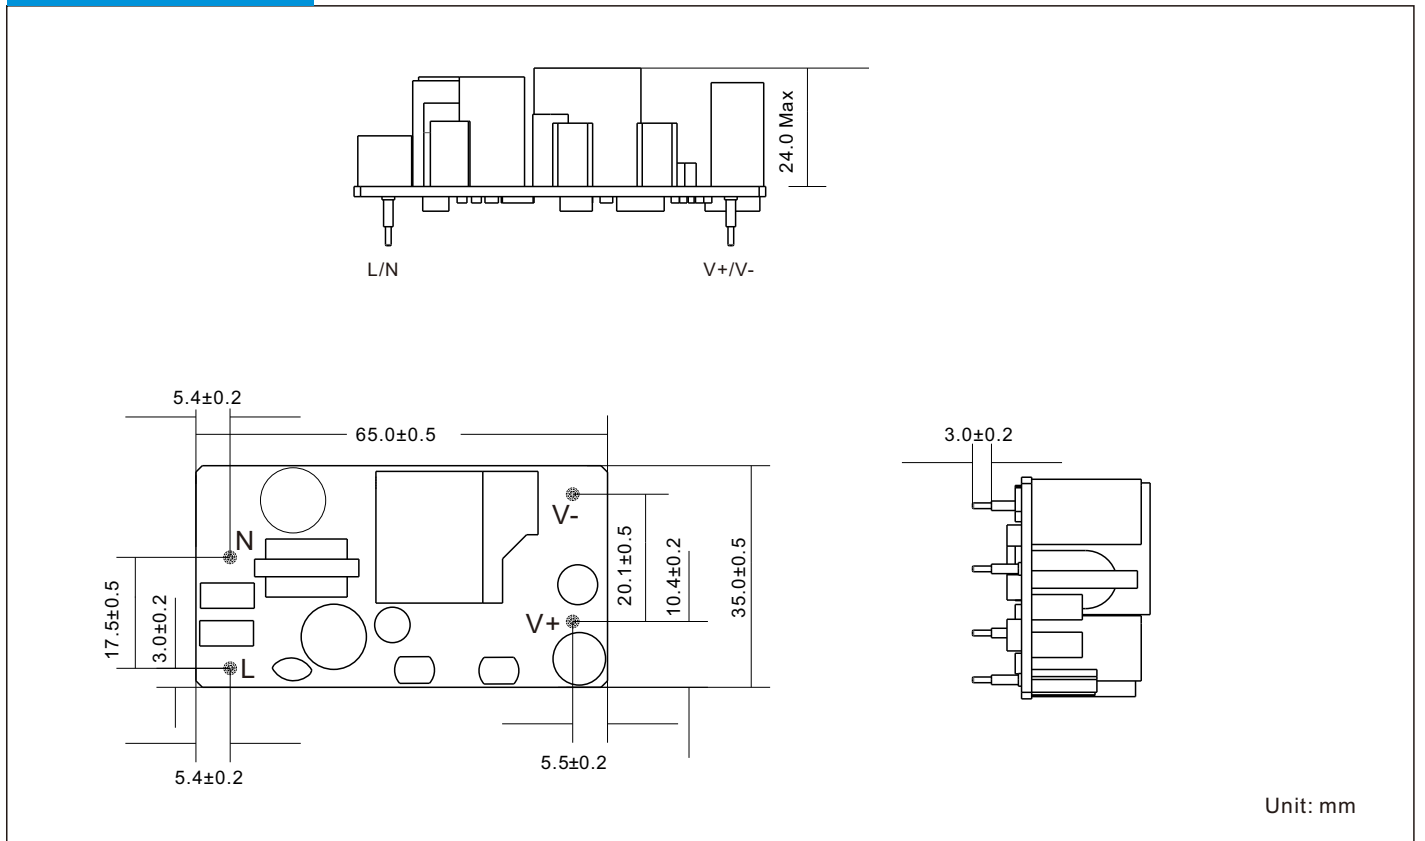


CB 
Product Features

- Meet medical & I.T.E. safety approvals
- 2 MOPP input to output isolation
- Leakage current $\leq 100\mu\text{A}$
- Energy efficiency level V
- $\leq 0.3\text{W}$ standby power
- Up to 5,000m operating altitude


Models & Parameters

Model Number	Voltage (V)	Current (A)	Rated Power	Ripple & Noise (max)	Voltage Tolerance	Line & Load Regulation	Efficiency (Average)	Start Up Delay
UE20-XXXYYYS-PA-OP	9.0	1.67	15.03W	150mVpk-pk	$\pm 5\%$	Line: $\pm 1\%$ Load: $\pm 5\%$	79.16%	$\leq 3\text{s}$
	12.0	1.67	20.04W	200mVpk-pk	$\pm 5\%$		80.97%	$\leq 3\text{s}$
	15.0	1.34	20.01W	200mVpk-pk	$\pm 5\%$		80.98%	$\leq 3\text{s}$

Mechanical Details


Input

Input Voltage Range	90-264VAC
Frequency Range	47-63Hz
Input Current	0.5A at 100VAC
Inrush Current	60A max at 240VAC cold start
Touch Leakage Current ^(max)	≤100μA at 264VAC

Environmental

Operating Temperature	-10°C to 70°C(50°C to 70°C refer to derating curve)
Storage Temperature	-20°C to 70°C
Operating Humidity	10% to 90% RH, non-condensing
Storage Humidity	5% to 90% RH
Operating Altitude	5,000m

General

Dimensions	65.0(L) 35.0(W) 24.0(H)mm
Weight	54g
MTBF	

Protection

Overload	105-210% rated output power, auto recovery
Over Voltage	105-250% rated output voltage input to reset
Short Circuit	Trip and restart (hiccup mode)

Safety Approvals

Safety Agency / Mark	Medical
CB	IEC60601-1
TüV Mark	EN60601-1

EMC

Emission	Medical	ITE
Conduction	IEC/EN60601-1-2,CISPR 11	EN55032, CISPR 32
Radiation	IEC/EN60601-1-2,CISPR 11	EN55032, CISPR 32
Harmonic Currents	EN61000-3-2, Class A	EN61000-3-2, Class A
Voltage Flicker	EN61000-3-3	EN61000-3-3
Immunity	IEC/EN60601-1-2	En55035, CISPR 35
ESD	IEC61000-4-2	±15KV air, ±8KV contact
Radiated Immunity	IEC61000-4-3	10V/m ,3V/m 80MHz - 2.7GMHz
EFT/Burst	IEC61000-4-4	±2KV on AC port, ±1KV on signal ports
Surge	IEC61000-4-5	±1KV line to line (DM)
Conducted Immunity	IEC61000-4-6	3Vrms, 6Vrms (0.15MHz-80MHz)
Magnetic Field	IEC61000-4-8	30 A/m
Dips & Interruptions	IEC61000-4-11	0%, 70%, 0% of UT

Others

Dielectric Withstand Voltage	4000VAC input to output
Insulation Resistance	10M Ohms, 500VDC input to output

Derating Curve
