



Product Features


- Medical & I.T.E. safety approvals
- 2 MOPP input to output isolation
- Leakage current $\leq 100\mu\text{A}$
- Energy efficiency level VI
- $\leq 0.15\text{W}$ standby power
- 5V/9V/12V/15V/20V outputs, up to 100W
- Up to 5,000m operating altitude
- Interchangeable plug design
- Meet USB PD3.0&PPS&QC3.0&QC2.0 fast charge agreement



Models & Parameters

Model Number	Voltage ^(*) (V)	Current (A)	Rated Power	Ripple & Noise (max)	Voltage Tolerance	Line & Load Regulation	Efficiency (Average)	Start Up Delay
UES100LCP2-SPC	5.0	0.01-3.00	15.00W	200mVpk-pk	$\pm 5\%$	Line: $\pm 2\%$ Load: $\pm 5\%$	82.0%	$\leq 3\text{s}$
	9.0	0.01-3.00	27.00W	200mVpk-pk	$\pm 5\%$		86.8%	$\leq 3\text{s}$
	12.0	0.01-3.00	36.00W	200mVpk-pk	$\pm 5\%$		87.5%	$\leq 3\text{s}$
	15.0	0.01-3.00	45.00W	200mVpk-pk	$\pm 5\%$		88.0%	$\leq 3\text{s}$
	20.0	0.01-5.00	100.0W	250mVpk-pk	$\pm 5\%$		89.0%	$\leq 3\text{s}$

Mechanical Details

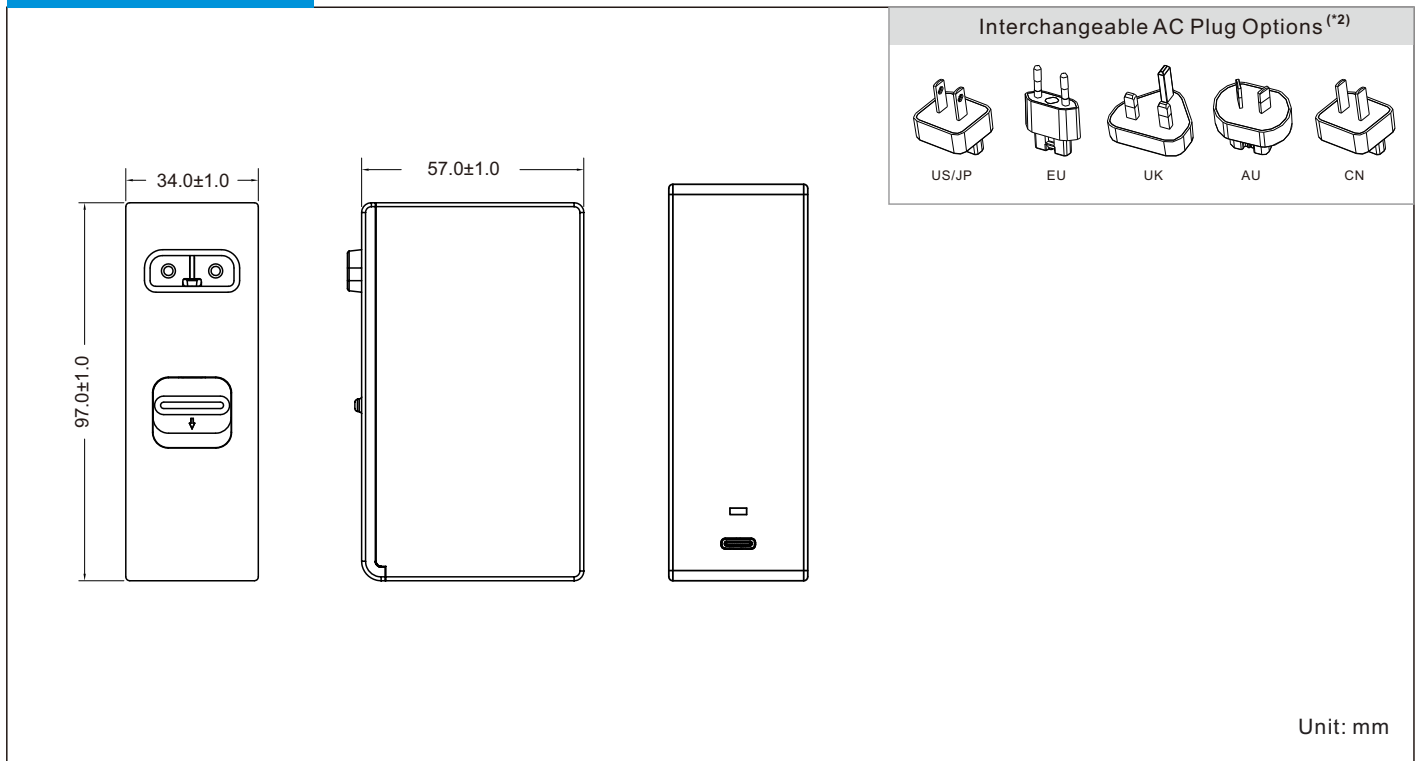

Notes

(*) 1, 2) Other options are available, please contact our sales representative for details.

Input

Input Voltage Range	80-264VAC
Frequency Range	47-63Hz
Input Current	1.8A at 80VAC
Inrush Current	100A max at 240VAC cold start
Touch Leakage Current ^(max)	≤ 100μA at 264VAC

Environmental

Operating Temperature	-10°C to 40°C
Storage Temperature	-40°C to 80°C
Operating Humidity	10% to 90% RH, non-condensing
Storage Humidity	5% to 90% RH
Operating Altitude	5,000m

General

Dimensions	97.0(L) 34.0(W) 57.0(H)mm
Weight	280g±10g
MTBF	>100,000hrs Telcordia_SR-332 at 25°C

Protection

Overload	105-140% rated output power, auto recovery
Over Voltage	110-130% rated output voltage input to reset
Short Circuit	Trip and restart (hiccup mode)

Safety Meet

Safety Agency / Mark	Medical	ITE
CB	IEC60601-1/IEC60601-1-11	IEC62368-1
UL	ANSI/AAMI ES60601-1/60601-1-11	UL62368-1
TÜV-SUD/Mark	CAN/CSA-C22.2 NO. 60601-1	CAN/CSA C22.2 NO.62368-1
CE	EN60601-1/60601-1-11	EN62368-1
FCC	-	EN62368-1
CCC	-	FCC PART 15
PSE	-	GB4943.1
RCM	-	J62368-1
		AS/NZS62368.1

EMC

Emission	Medical	ITE
Conduction	IEC/EN60601-1-2,CISPR 11	EN55032,CISPR 32
Radiation	IEC/EN60601-1-2,CISPR 11	EN55032,CISPR 32
Harmonic Currents	EN61000-3-2, Class A	EN61000-3-2, Class A
Voltage Flicker	EN61000-3-3	EN61000-3-3
Immunity	IEC/EN60601-1-2	EN55035, CISPR 35
ESD	IEC61000-4-2	±15KV air, ±8KV contact
Radiated Immunity	IEC61000-4-3	10V/m ,3V/m 80MHz - 2.7GMHz
EFT/Burst	IEC61000-4-4	±2KV on AC port, ±1KV on signal ports
Surge	IEC61000-4-5	±1KV line to line ,±2KV line to GND
Conducted Immunity	IEC61000-4-6	3Vrms, 6Vrms (0.15MHz-80MHz)
Magnetic Field	IEC61000-4-8	30 A/m
Dips & Interruptions	IEC61000-4-11	0%, 70%, 0% of UT

Others

Dielectric Withstand Voltage	4000VAC input to output
Insulation Resistance	100M Ohms, 500VDC input to output