


Enclosed AC/DC Switching Power Supply

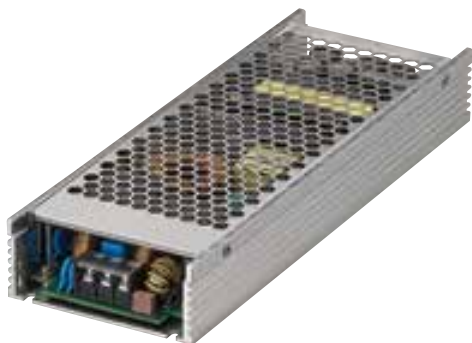

Features

- Slim and Low Profile
- Protections:
Short circuit / Over voltage / Over current
Over temperature
- Energy Efficiency $\geq 92\%$ ~95% depends on models
- MTBF > 50,000 hours
- Fanless and Conduction-cooled Design
- Withstand 300VAC surge input for 5 seconds
- Built-in Active PFC Function
- DC OK Relay Contact
- LED Indicator

EP1500 U - XX YY

- U:** Output range
XX: Specified output voltage, i.e. 12 is 12VDC
YY: Differential segmentation

General Specification

OUTPUT

MODEL No.	MAX. OUTPUT POWER (W)	OUTPUT VOLTAGE (Vo)	MIN. LOAD (Io)	MAX. LOAD (Io)	LOAD REGULATION	LINE REGULATION	RIPPLE & NOISE
EP1500A	500.4W	12V	0A	41.7A	$\pm 0.5\%$	$\pm 0.5\%$	200mV
EP1500B	501W	15V	0A	33.4A	$\pm 0.5\%$	$\pm 0.5\%$	200mV
EP1500C	501.6W	24V	0A	20.9A	$\pm 0.5\%$	$\pm 0.5\%$	240mV
EP1500D	500.4W	36V	0A	13.9A	$\pm 0.5\%$	$\pm 0.5\%$	360mV
EP1500E	501.6W	48V	0A	10.45A	$\pm 0.5\%$	$\pm 0.5\%$	360mV

NOTE:

- 1 : Ripple & Noise is measured by using 20MHz bandwidth limited oscilloscope and terminated each output with a 0.1uF ceramic capacitor & parallel with 47uF aluminum capacitor at full load and nominal line.
 2 : Line regulation is defined by changing $\pm 10\%$ of input voltage from nominal line at rated load.
 3 : Max. Power (W) $\geq V_o \times I_o$

INPUT

- Input Range: 100 to 240VAC
- Frequency: 50 to 60Hz
- Input Current: $\leq 5A$
- Inrush Current: $\leq 60A/230VAC$
- Hold Up Time: $\geq 8.3ms$
- Turn On Time: $\leq 1s$


PROTECTION

- Short Circuit Protection: Auto Recovery
- Over Current Protection: Auto Recovery
- Over Voltage Protection: Auto Recovery
- Over Temperature Protection: Auto Recovery


ENVIRONMENT

- Operating Temperature: -30 to 70°C
- Storage Temperature: -40 to 85°C
- Operating Humidity: 20% to 90 %
- Storage Humidity: 10% to 95 %

DERATING CURVE

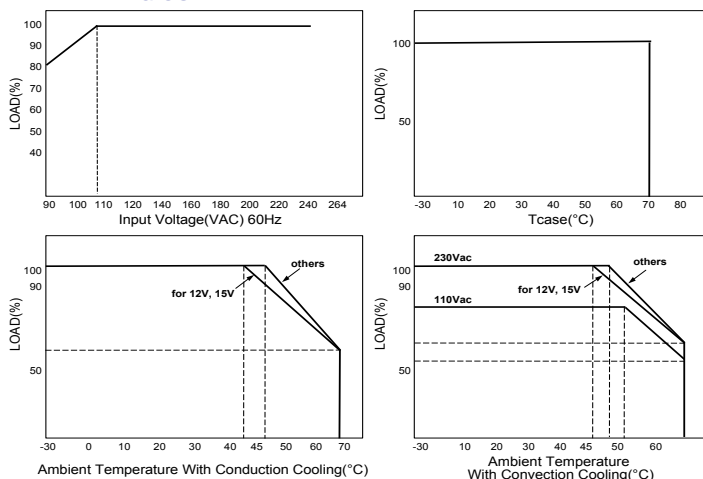

MECHANICAL

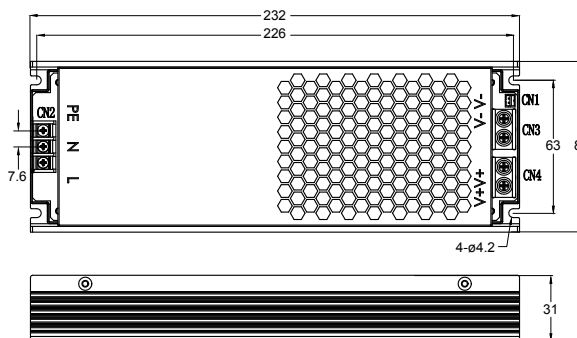

- Mechanical Size: 232L x 81W x 31H (mm)
- Pin Assignment:
AC Input terminal(CN2): (DEGSON)DG28C-B-03P

Pin No.	Assignment
1	AC/L
2	AC/N
3	⏏

DC output terminal(CN3,CN4): EDAC terminal

Pin No.	Assignment
TB2	+V
TB3	-V

- Weight: 1000g

SAFETY

- Complied with UL 62368-1, CAN/CSA C22.2 No. 62368-1, TUV EN 62368-1, CB IEC 62368-1, FCC Part 15B, CE EMC(EN 55032+EN 55035)