

**FEATURES**

- Medical 60601-1 3<sup>rd</sup> Edition approved
- 3-pole IEC320-C14 AC inlet
- Fully meet CEC, ERP, EISA Efficiency level V requirements
- Build-in 40x40x10mm DC fan with fan speed control
- Earth leakage current : < 228uA @264VAC
- No load Power consumption < 500mW
- 3 year warranty



**ELECTRICAL SPECIFICATIONS**

- Input range : 90 - 264VAC
- Frequency : 47 - 63Hz
- Power Factor : > 0.95 @115VAC; > 0.90 @230VAC @full load
- Inrush current : < 65A peak @115VAC; < 130A peak @230VAC cold start @25°C
- Input current (rms) : 3.5A @90VAC; 1.75A @264VAC max.
- Efficiency : > 87% @average load, 115/230VAC
- Maximum output power (Po) : 250Watts
- Hold-up time : > 16ms typical @full load, 115VAC
- Short Circuit Protection: Auto-recovery
- Over Load Protection: Auto-recovery
- Over Voltage Protection: Shutdown and latch off, AC recycle

**RoHS Compliant**

Dimension : L188.5 × W104.5 × H60 mm ( 7.42" × 4.1" × 2.36" )  
Weight : 1.05 kgs. ( 2.31 lbs. )

**SAFETY STANDARDS**

UL60601-1 3<sup>rd</sup> Edition  
CSA-C22.2 No.60601-1 3<sup>rd</sup> Edition  
EN60601-1 3<sup>rd</sup> Edition  
IEC EN60601-1 3<sup>rd</sup> Edition

**EMC STANDARDS**

EN60601-1-2  
FCC Part 18 Class B  
EN55011 Class B  
CE

**ENVIRONMENTAL**


- Operating temperature : -20 to +60°C (Derate linearly 2.5% per °C from 41 to 60°C)
- Storage temperature : -20°C to +85°C
- Humidity: 10% ~ 95%.
- MTBF : > 140,000 hours at full load and 25°C ambient temperature

**DC OUTPUT & FEATURES**

Model	Output Rating		Po	O/P Regulation	Ripple & Noise(Vp-p)	Efficiency Level
PW-M250A4-1Y120E	12V	20.83A	250W	±5%	240mV	V
PW-M250A4-1Y160E	16V	15.63A	250W	±5%	300mV	V
PW-M250A4-1Y190E	19V	13.16A	250W	±5%	300mV	V
PW-M250A4-1Y200E	20V	12.5A	250W	±5%	300mV	V
PW-M250A4-1Y240E	24V	10.42A	250W	±5%	300mV	V
PW-M250A4-1Y360E	36V	6.94A	250W	±5%	300mV	V
PW-M250A4-1Y480E	48V	5.21A	250W	±5%	300mV	V

**Note:** 1. Ripple and noise are measured at oscilloscope 20MHz bandwidth by a 10uF electrolytic capacitor and a 0.1uF ceramic capacitor in parallel at output connector.

**MECHANICAL SPECIFICATION**

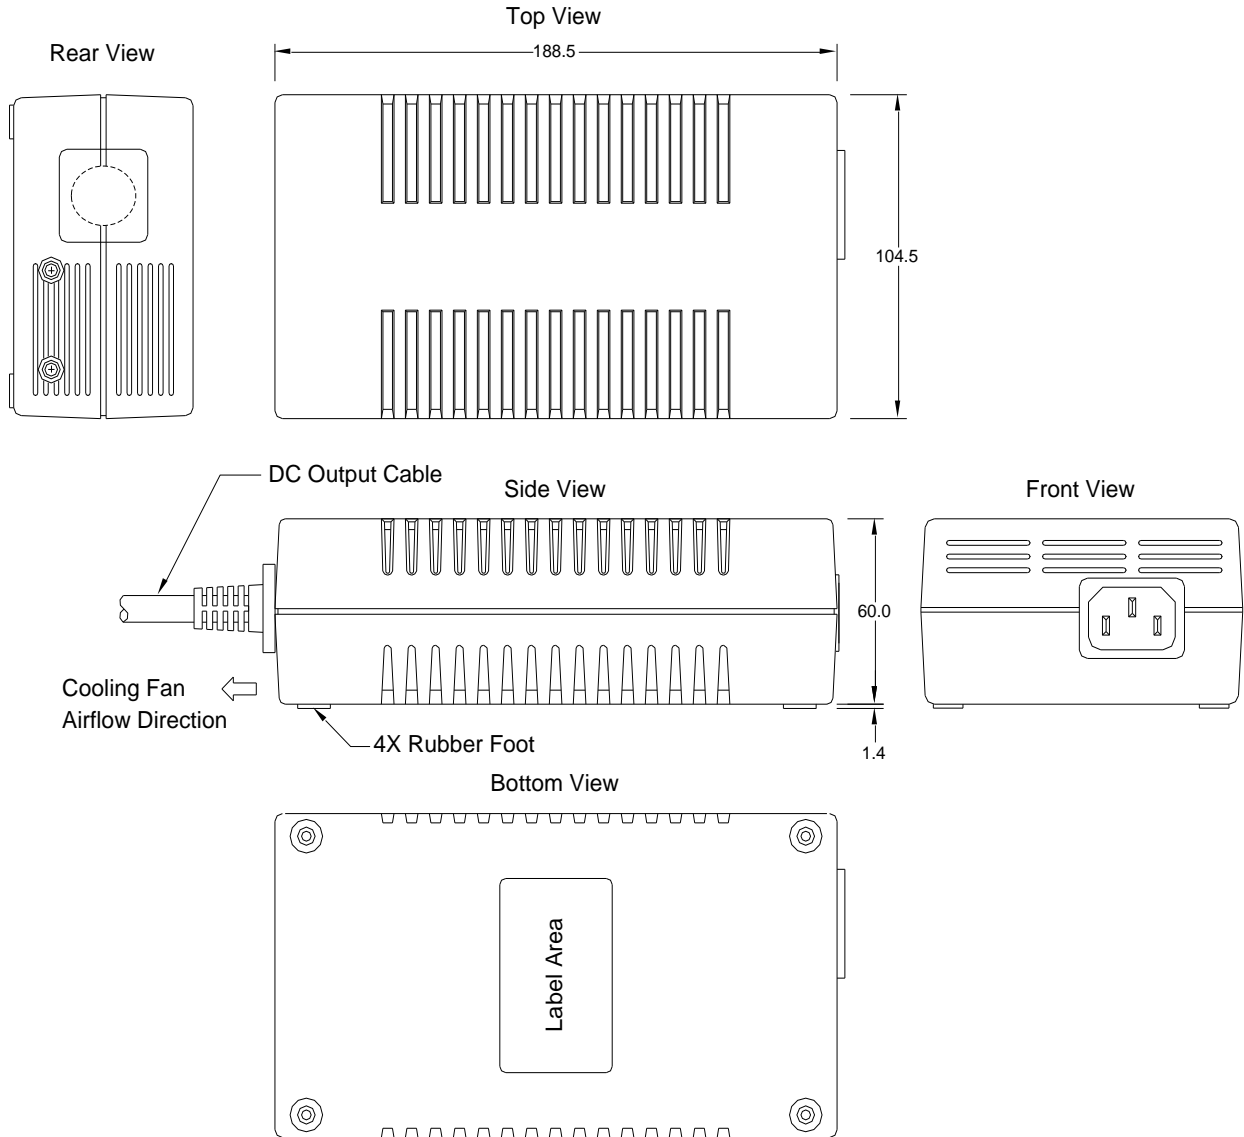

- Note:
1. AC Inlet : IEC320-C14
  2. Plastic Case Color : Black
  3. Tolerance :  $\pm 0.5\text{mm}$
  4. Unit : mm

**STANDARD OUTPUT CABLE**

1. AWM 2464 # 16AWG / 6C + SHIELDING, UL 80°C 300V VW-1, 1000 mm $\pm$ 30mm(MIN) for 16V~48V output; 800mm $\pm$ 30mm for 12V output.
2. Depends on customers requirements.